

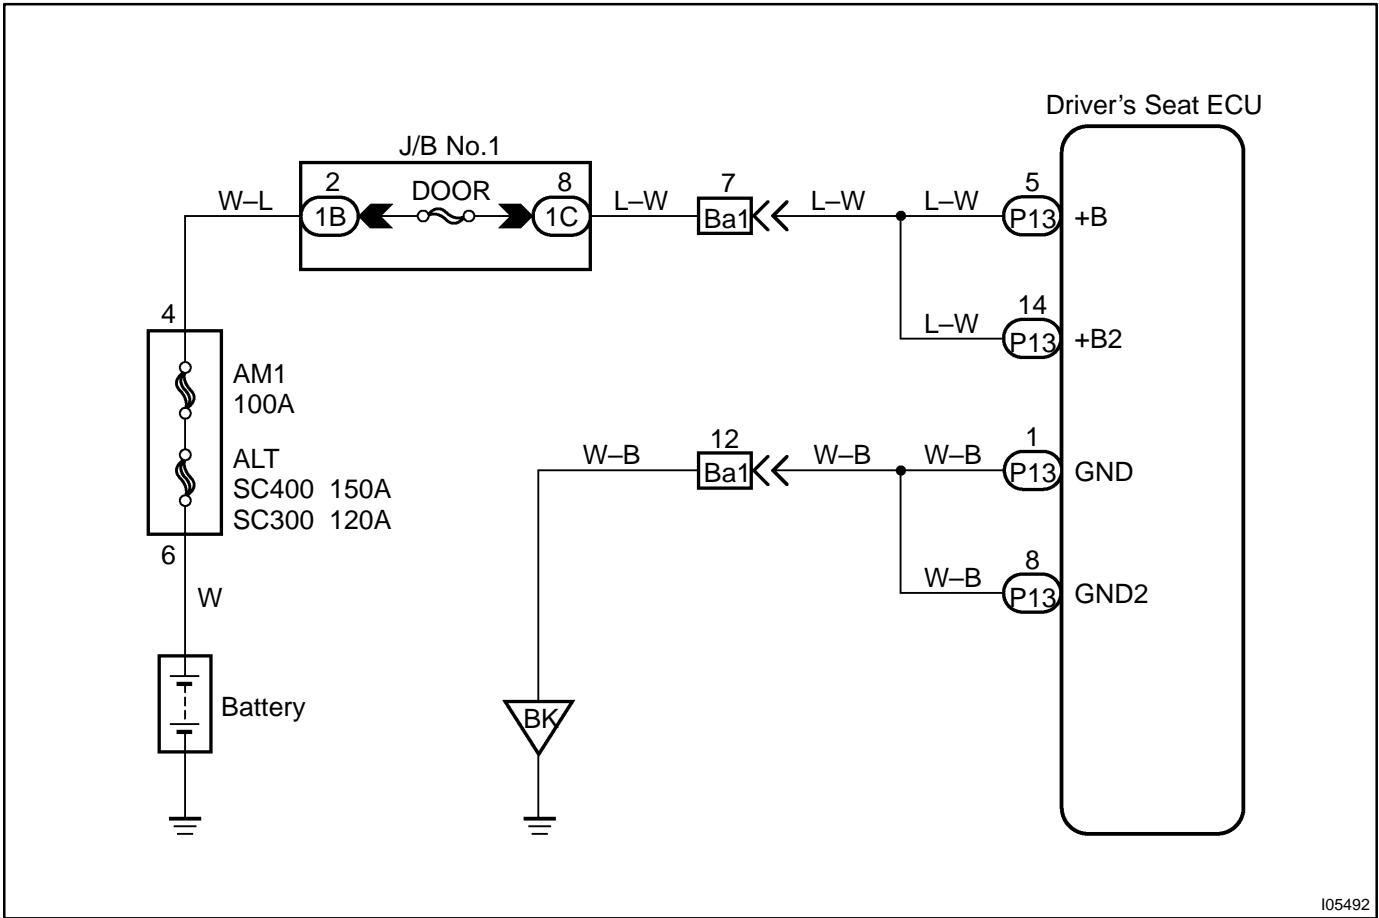
# CIRCUIT INSPECTION

## +B Power Source Circuit

### CIRCUIT DESCRIPTION

This is the power source for motors such as the slide motor and reclining motor.

### WIRING DIAGRAM



### INSPECTION PROCEDURE

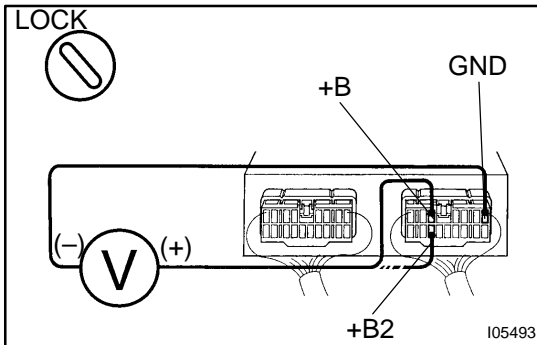
1	Check DOOR fuse.
---	------------------

NG

Check for short in all the harness and components connected to the DOOR fuse  
(See attached wiring diagram).

OK

## 2 Check voltage between terminals +B, +B2 and GND of ECU connector.

**PREPARATION:**

Remove ECU with connectors still connected.

**CHECK:**

Measure voltage between terminals +B, +B2 and GND of ECU connector.

**OK:**

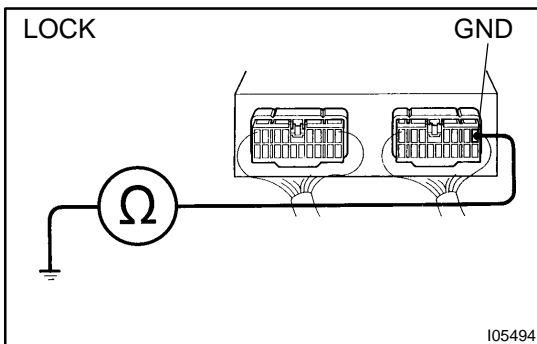
**Voltage: 10 – 14 V**

**OK**

Proceed to next circuit inspection shown on matrix chart (See page DI-597).

**NG**

## 3 Check continuity between terminal GND of ECU connector and body ground.

**CHECK:**

Measure resistance between terminal GND of ECU and body ground.

**OK:**

**Resistance: 1 Ω or less**

**NG**

Repair or replace harness or connector.

**OK**

Check and repair harness or connector between ECU and battery.