


INSTALLATION


1. INSTALL ROOF DRIP SIDE FINISH MOULDING

- (a) Install the roof drip side finish moulding with the clips.
- (b) Using an air riveter with nose piece, strike rivets.

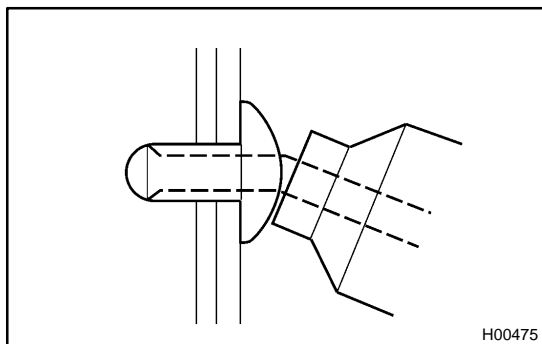


NOTICE:

If the rivets is not positioned perpendicularly it will bend the mandrel. When the trigger is then pulled, it may damage SST.

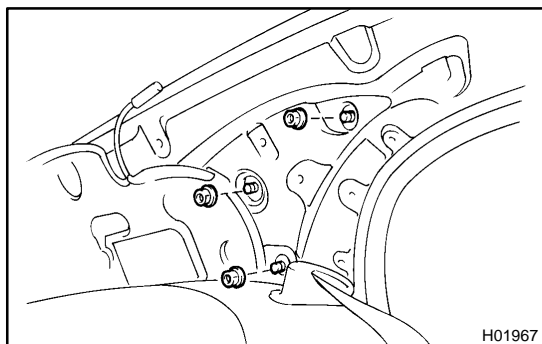

- (c) Install the 3 nuts.

2. INSTALL ROOF SIDE INNER GARNISH PAD

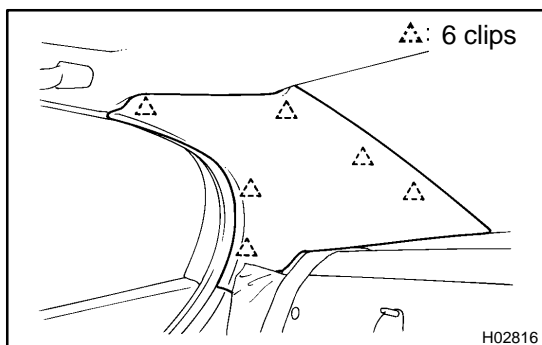

3. INSTALL ROOF SIDE INNER GARNISH

- (a) Install the roof side inner garnish.
- (b) Install the rear seat headrest.