


DTC	C1336 / 39	Zero Point Calibration of Deceleration Sensor Undone
------------	-------------------	---

CIRCUIT DESCRIPTION

DTC No.	DTC Detecting Condition	Trouble Area
C1236 / 39	At the initial time after replacing the computer, or after erasing the deceleration sensor memory by operating the terminals Ts and E ₁ of DLC1, the ignition is turned ON and the vehicle is driven in any mode except for the test mode.	<ul style="list-style-type: none"> • Deceleration sensor • Deceleration sensor circuit • Zero point calibration not done

WIRING DIAGRAM

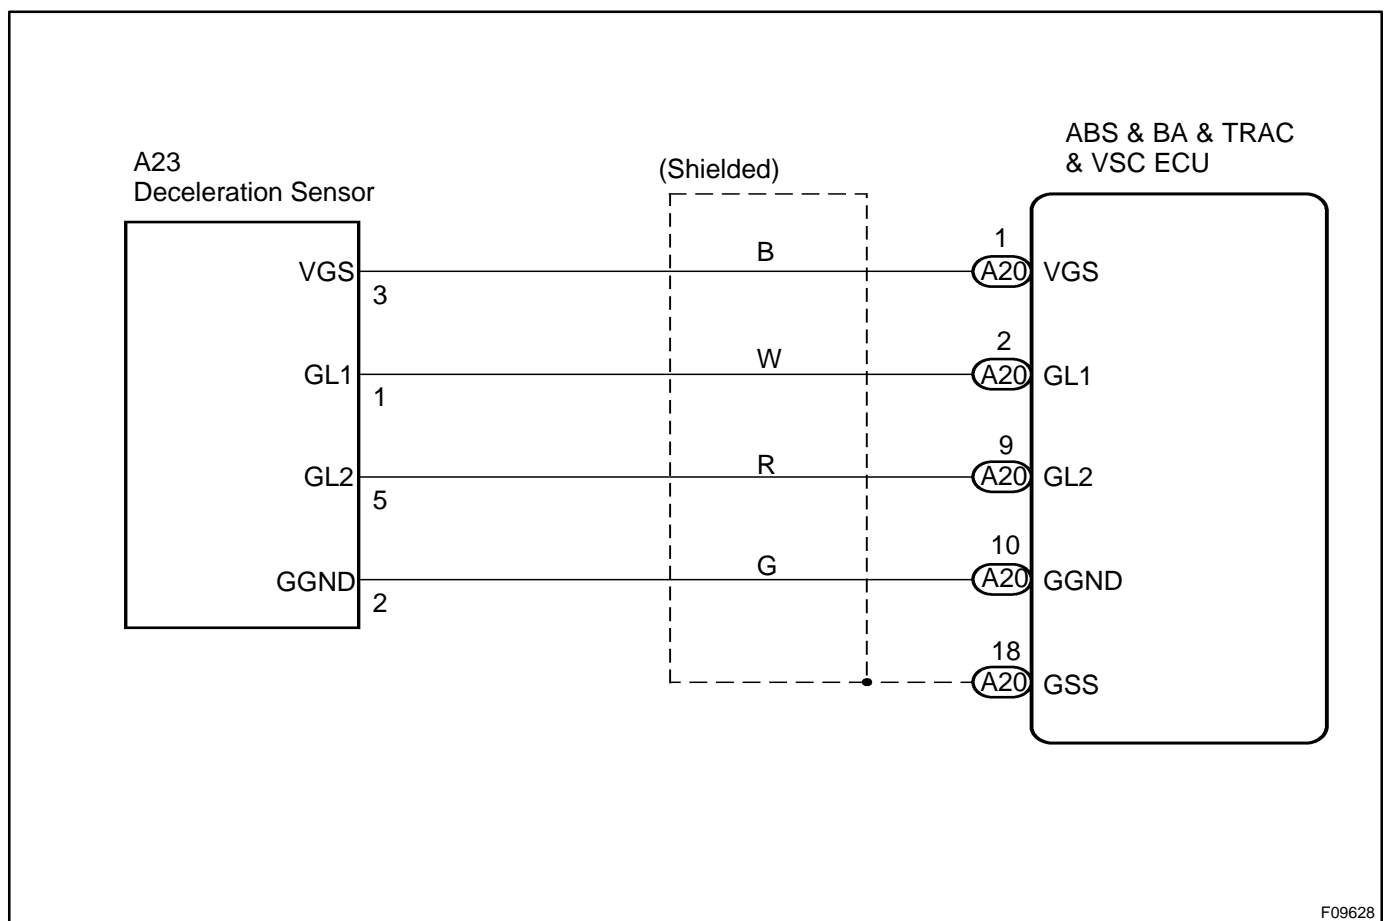

INSPECTION PROCEDURE

1	Carry out deceleration sensor zero point calibration and confirm it by VSC warning light (See page DI-570).
---	--

OK:

VSC warning light blinks

OK	No problem.
----	-------------

NG

2	Check DTC for the VSC (See page DI-570).
---	---

*1: Other than DTC C1336 / 39 is output.

*2: DTC C1336 / 39 only is output.

*1	Repair ABS control system according to the code output.
----	---

*2

3	Check for open and short circuit in harness and connector between deceleration sensor and ABS & BA & TRAC & VSC ECU (See page IN-32).
---	--

NG	Repair or replace harness or connector.
----	---

OK

4	Check deceleration sensor (See page DI-484).
---	---

NG	Replace deceleration sensor.
----	------------------------------

OK

Check and replace ABS & BA & TRAC & VSC ECU.