


## REMOVAL

1. **REMOVE FRONT WHEEL**  
Torque: 103 N·m (1,050 kgf·cm, 76 ft·lbf)
2. **REMOVE FRONT SHOCK ABSORBER**  
(See page [SA-18](#))

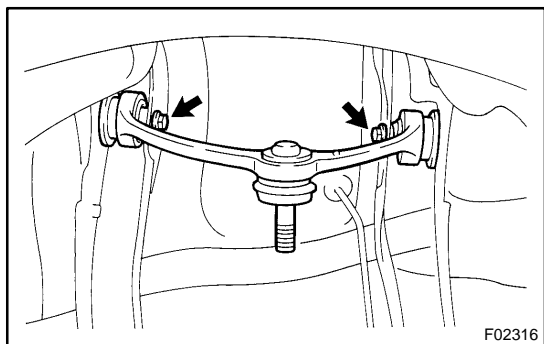

3. **REMOVE UPPER SUSPENSION ARM**  
Remove the 2 bolts and upper suspension arm.  
Torque: 53 N·m (540 kgf·cm, 39 ft·lbf)

**HINT:**

At the time of installation, after stabilizing the suspension, torque the bolts.