
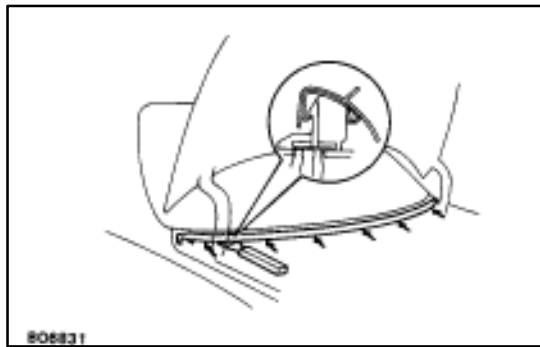


Back Window Moulding COMPONENTS

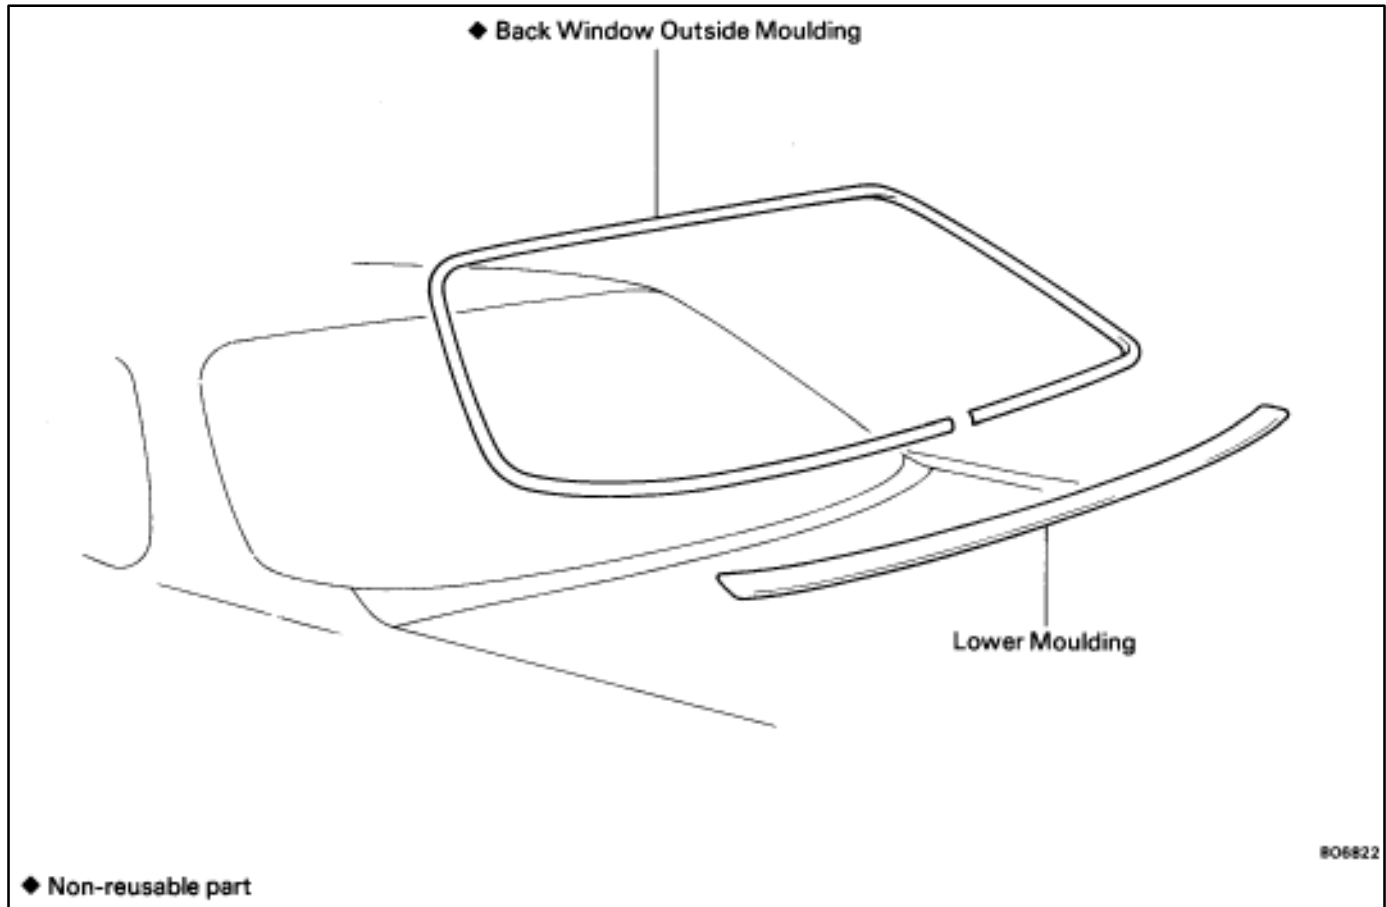

REMOVAL AND INSTALLATION OF BACK WINDOW LOWER MOULDING


1. REMOVE LOWER MOULDING


Using the scraper, pry off the moulding from the six clips and remove the moulding.

HINT: Tape the scraper tip before use.

2. IF NECESSARY, REPLACE LOWER MOULDING CLIPS


HINT: There are two types of clips for moulding installation. Location of these clips is as shown.

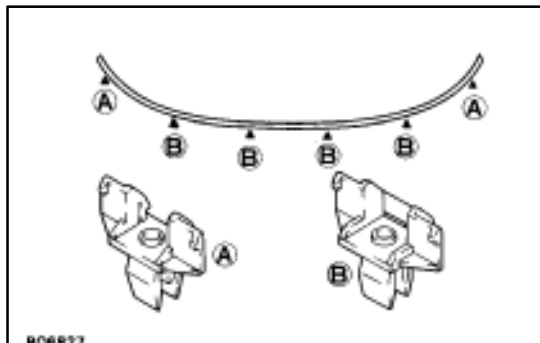

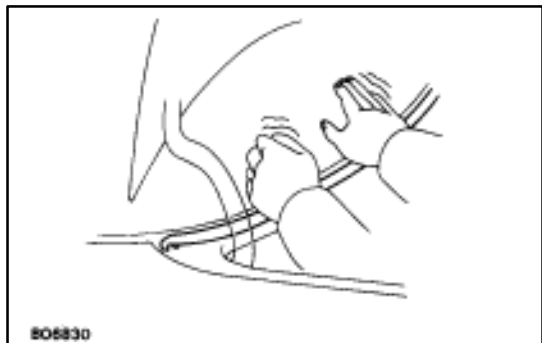

3. INSTALL LOWER MOULDING

- (a) Place the moulding onto the body.
- (b) Tap the moulding by your hand to install the moulding.

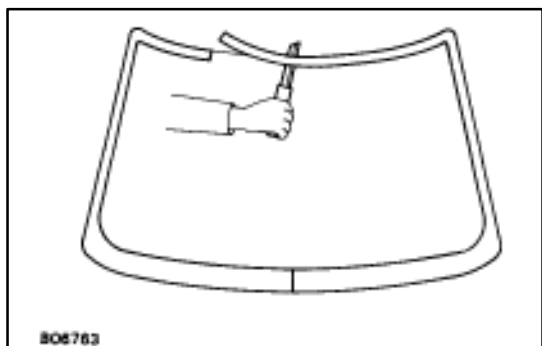


REMOVAL AND INSTALLATION OF BACK WINDOW OUTSIDE MOULDING

1. REMOVE BACK WINDOW GLASS

(See page [BO-54](#))

2. REMOVE OUTSIDE MOULDING


Using a knife, cut loose the moulding around the glass.

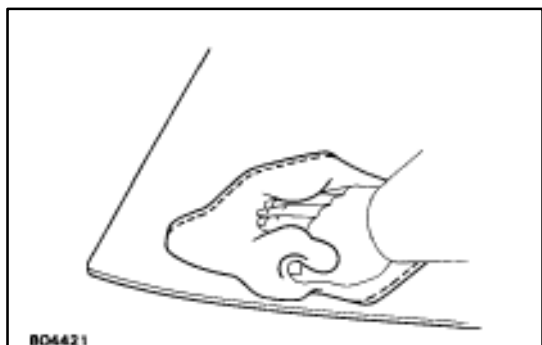

3. CLEAN CONTACT SURFACE OF GLASS

Using a cleaner, clean the contact surface black-colored area.

NOTICE: Do not touch the glass face after cleaning it.

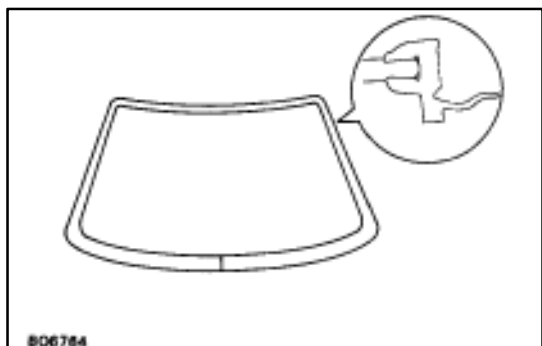

4. INSTALL OUTSIDE MOULDING

- (a) Coat the edge of the glass with primer.
- (b) Coat the moulding with adhesive on all contact surfaces.
- (c) Install the moulding.
- (d) Use a scraper to remove any excess or protruding adhesive.

5. INSTALL BACK WINDOW GLASS

6. INSTALL LOWER MOULDING