



Body Outside Moulding COMPONENTS

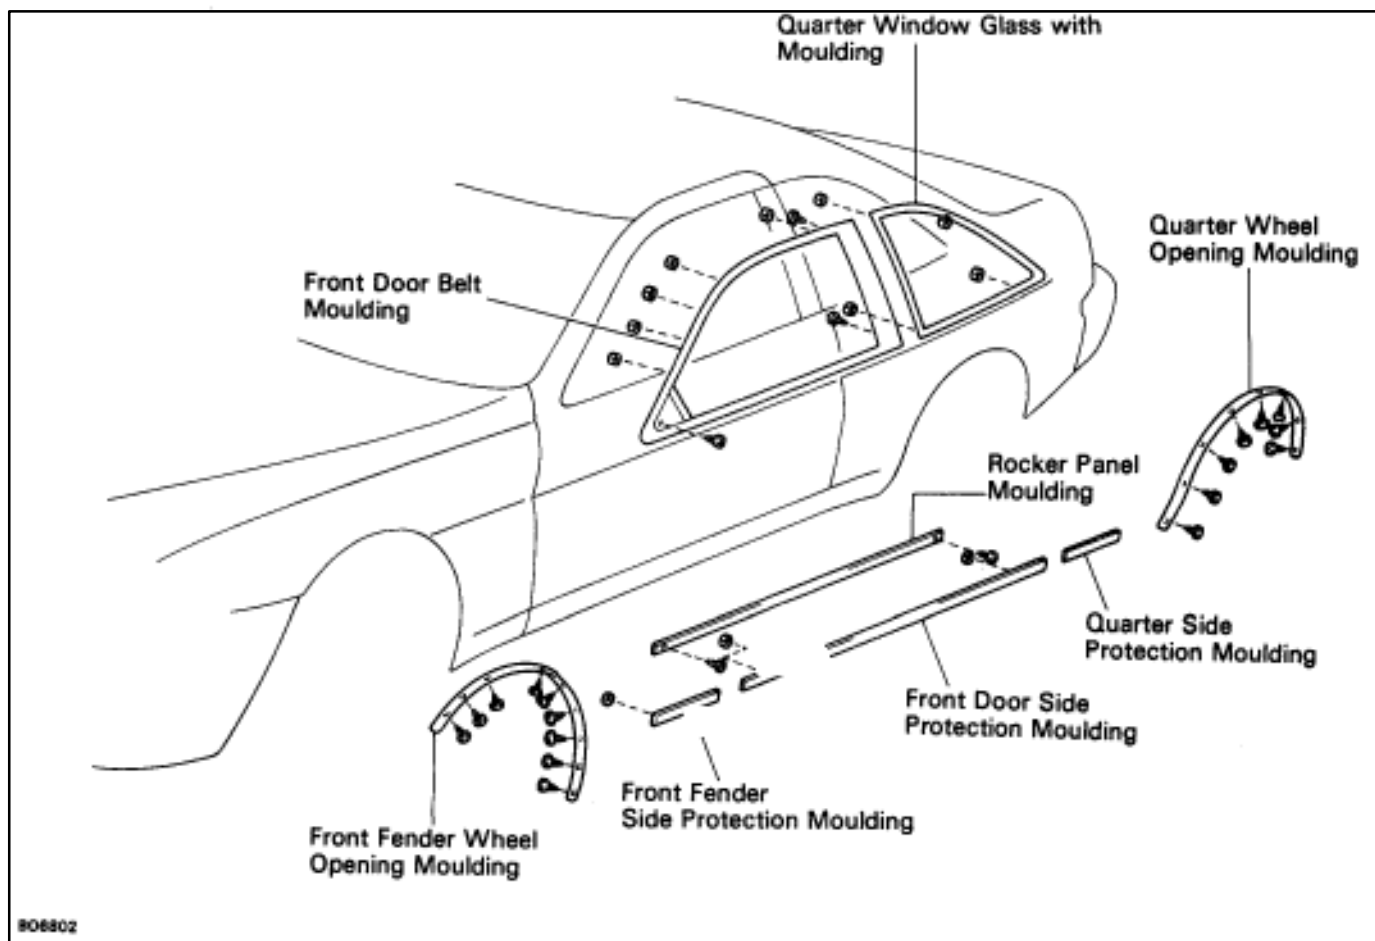

Front Door Belt Moulding REMOVAL AND INSTALLATION

- REMOVE FOLLOWING PARTS:**
(See steps 1 to 7 on pages [BO-33](#) to 34)
 - Armrest base panel
 - Door Trim
 - Door Speaker Grille
 - Door Trim Upper Panel
 - Outside Rear View Mirror
- REMOVE FRONT DOOR BELT MOULDING**
(See step 13 on page [BO-35](#))
- INSTALL FRONT DOOR BELT MOULDING**
(See step 8 on page [BO-39](#))
- INSTALL FOLLOWING PARTS:**
Install the parts following removal sequence in reverse.
(See steps 14 to 20 on pages [BO-40](#) to 41)

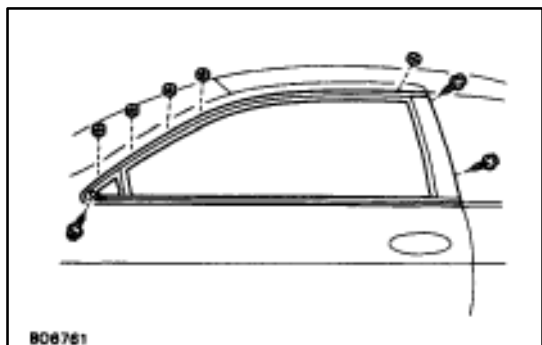


Quarter Window Glass with Moulding REMOVAL AND INSTALLATION

(See page [BO-101](#))

1. REMOVE FOLLOWING PARTS:

(See steps 5 to 8 on pages [BO-123](#) to 124)

- (a) Rear seat cushion
- (b) Rear seat back
- (c) Quarter trim
- (d) Roof side inner garnish
- (e) Shoulder belt anchor

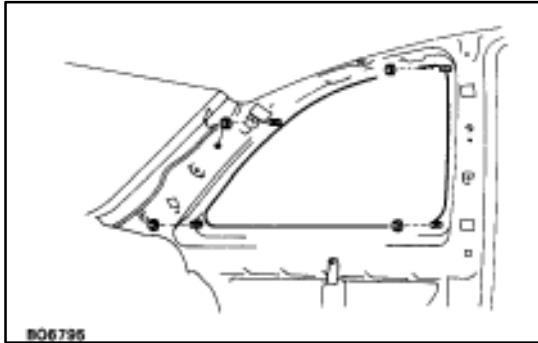

2. REMOVE QUARTER WINDOW GLASS

(See page [BO-52](#))

3. INSTALL QUARTER WINDOW GLASS

(See page [BO-53](#))

4. INSTALL FOLLOWING PARTS:

Install the parts following removal sequence in reverse.

Rocker Panel Moulding REMOVAL AND INSTALLATION



(See page [BO-101](#))

1. REMOVE ROCKER PANEL MOULDING

- (a) Remove two screws.
- (b) Pry loose clips and remove the moulding onto the panel.

2. INSTALL ROCKER PANEL MOULDING

- (a) Insert the top of clips into the panel hole and tap the moulding onto the panel.
- (b) Install two screws.

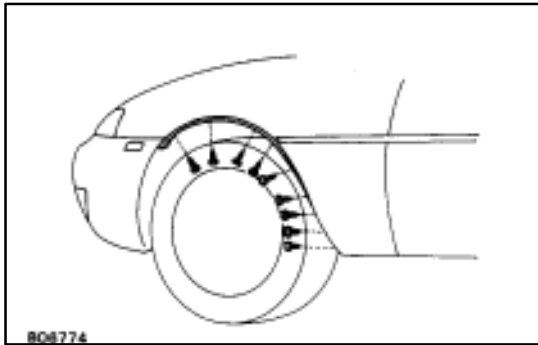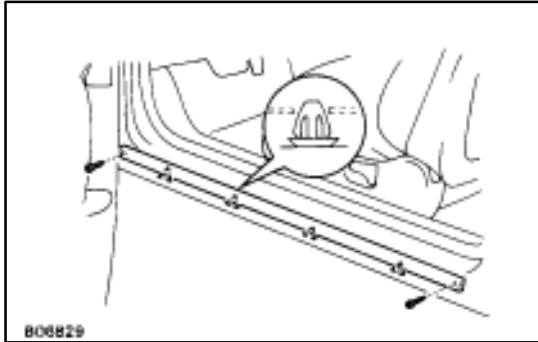

Front Fender Wheel Opening Moulding REMOVAL AND INSTALLATION


(See page [BO-101](#))

1. REMOVE FRONT FENDER WHEEL OPENING MOULDING

Remove eight screws and the moulding.

2. INSTALL FRONT FENDER WHEEL OPENING MOULDING


Install eight screws and the moulding.

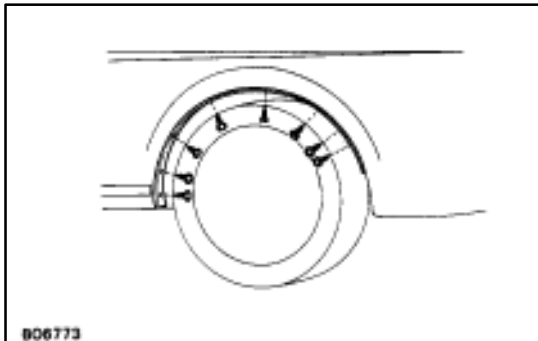

Quarter Wheel Opening Moulding REMOVAL AND INSTALLATION

(See page [BO-101](#))

HINT: Do the same manner as the front fender wheel opening moulding.

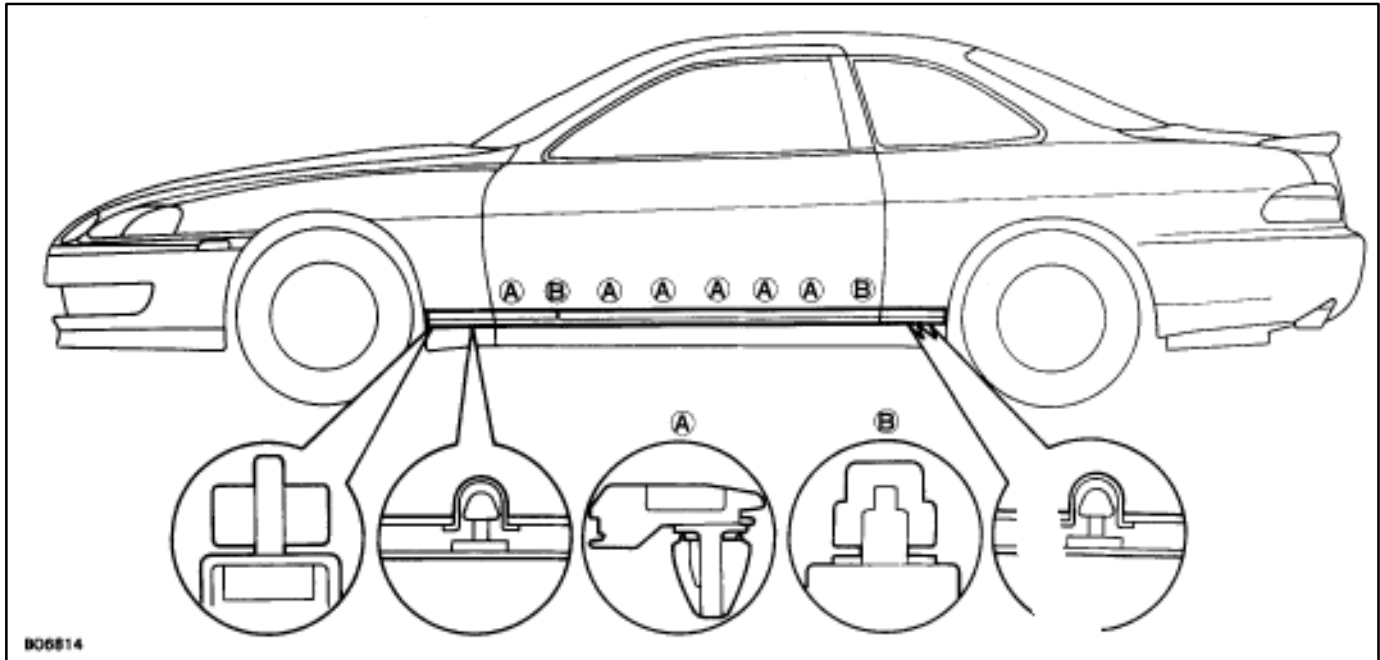

Front Fender Side Protection Moulding REMOVAL AND INSTALLATION

1. **REMOVE FRONT FENDER SIDE PROTECTION Moulding**
 - (a) Remove a nut.
 - (b) Pry loose the clip and remove the moulding onto the panel.
2. **INSTALL FRONT FENDER SIDE PROTECTION Moulding**
 - (a) Insert the top of the clip into the panel hole and tap the moulding onto the panel.
 - (b) Install a nut.

Front Door Side Protection Moulding REMOVAL AND INSTALLATION

1. **REMOVE FRONT DOOR SIDE PROTECTION Moulding**
 - (a) Remove two nuts.
 - (b) Pry loose clips remove the moulding onto the panel.
2. **INSTALL FRONT DOOR SIDE PROTECTION Moulding**
 - (a) Insert the top of clips into the panel hole and tap the moulding onto the panel.
 - (b) Install two nuts.

Quarter Side Protection Moulding REMOVAL AND INSTALLATION

1. **REMOVE QUARTER SIDE PROTECTION Moulding**
 - (a) Remove a nut.
 - (b) Pry loose clips and remove the moulding onto the panel.
2. **INSTALL QUARTER SIDE PROTECTION Moulding**
 - (a) Insert the top of clips into the panel hole and tap the moulding onto the panel.
 - (b) Install a nut.