


DIFFERENTIAL

Description

The differential has an eight-inch ring gear to ensure accurate operation at high power output and high speed. Optimal design of the hypoid gear, precise machining and assembly of each component part are incorporated into this differential.

The differential is carried by a rear suspension member via rubber mounts suppress vibration and noise bearing transmitted to the body.

SECTIONAL VIEW

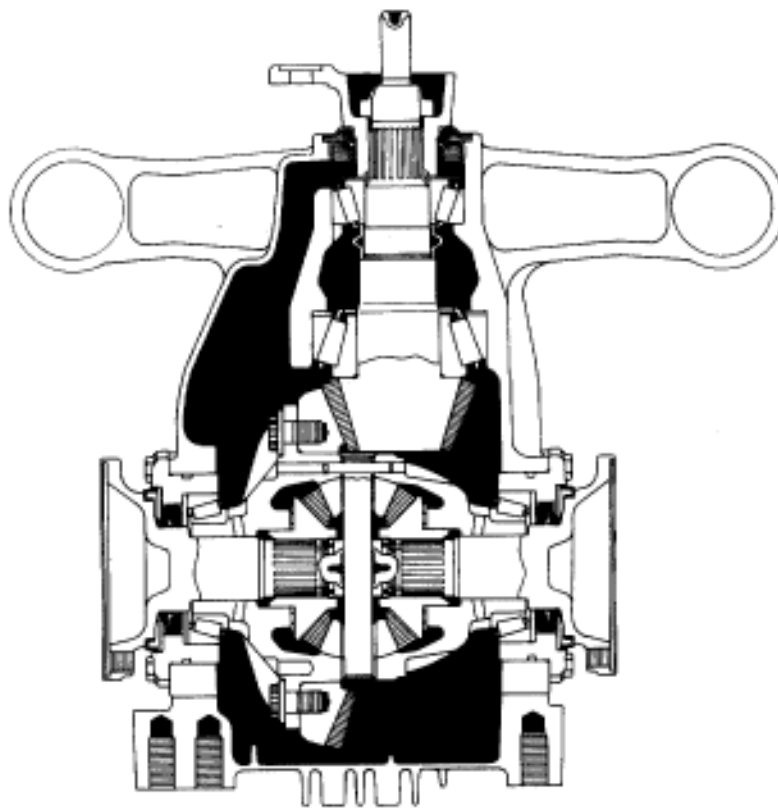

SA3550