

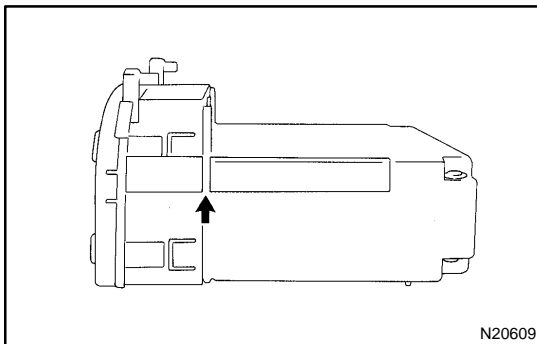


DISASSEMBLY

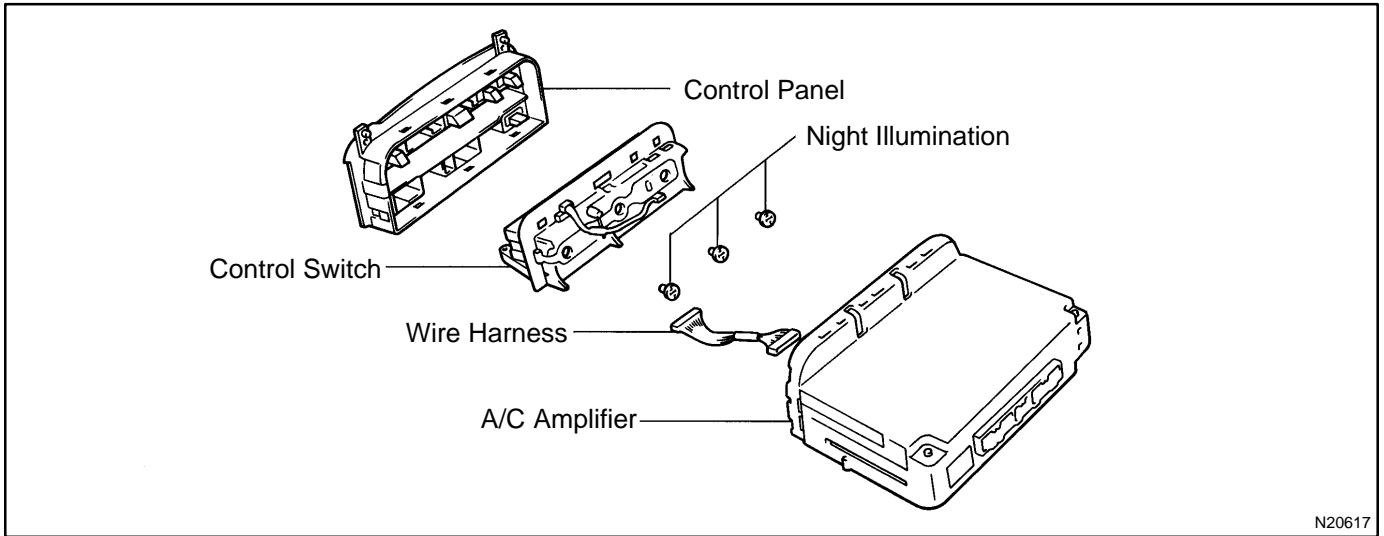


1. SEPARATE CONTROL PANEL FROM CASE


- (a) Cut up cloth tapes affixed on both sides of the case, as shown in the illumination.

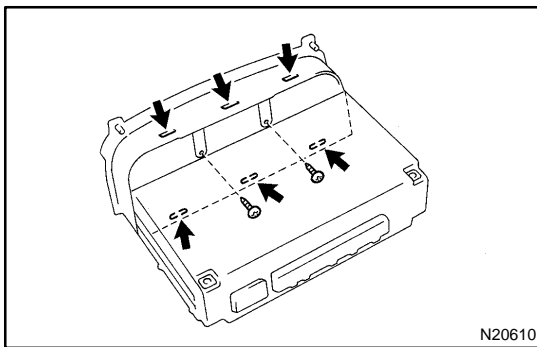


- (b) Remove the 2 screws and release the 6 claws to separate the control panel from the case.

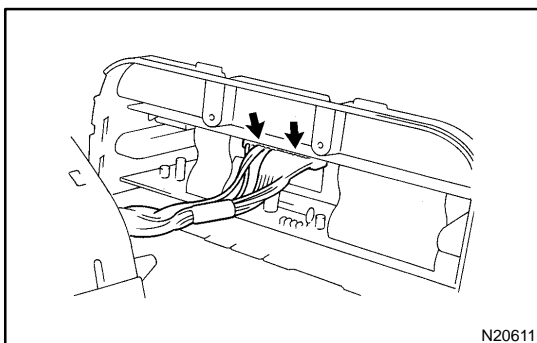

- (c) Disconnect the 2 connectors and separate the control panel from the case.
(d) Remove the wire harness from control panel.

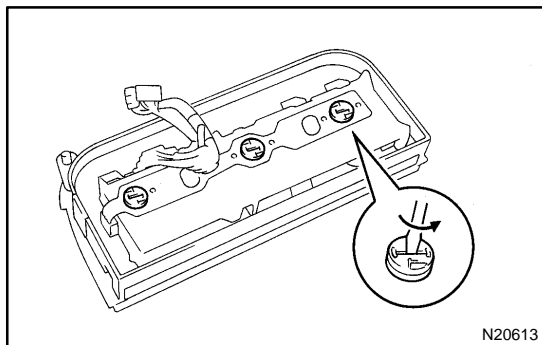**2. REMOVE NIGHT ILLUMINATION BULB**

Using a flat-bladed screwdriver, remove the night illumination bulbs.

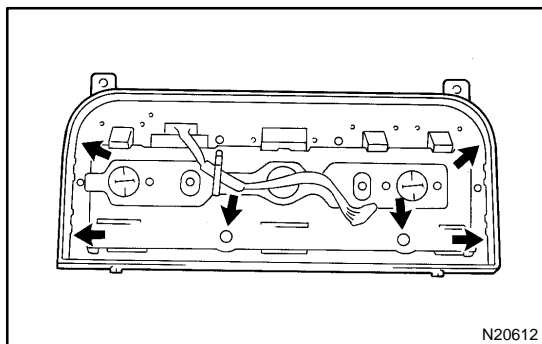**3. REMOVE CONTROL SWITCH**

Release the 2 screws and the 4 clips as shown on the illumination, then remove the control switch.