


## ■ MULTI DISPLAY

### 1. General


- The multi display size has been changed from usual 5.8-inch to 7-inch to improve the visibility and operational ability.
- Through the use of the GPS (Global Positioning System) and map data in a DVD (Digital Versatile Disc), this navigation system analyzes the position of the vehicle and indicates that position on the map that is displayed on the screen.

### 2. System Diagram

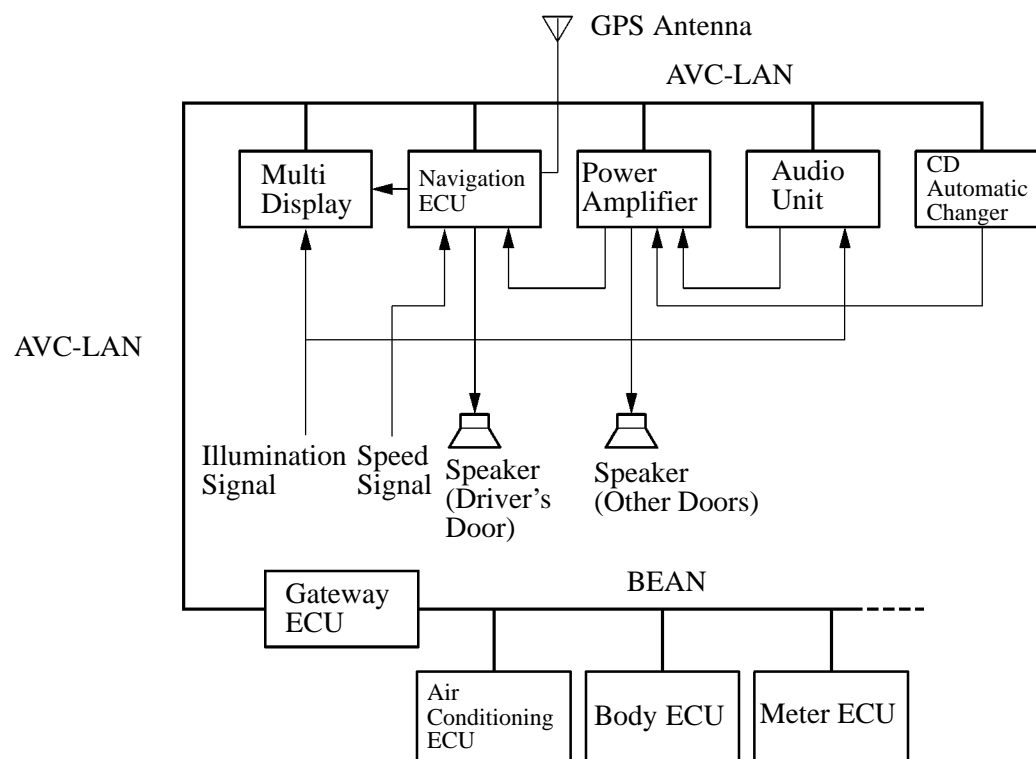

188BE07

### 3. Layout of Components

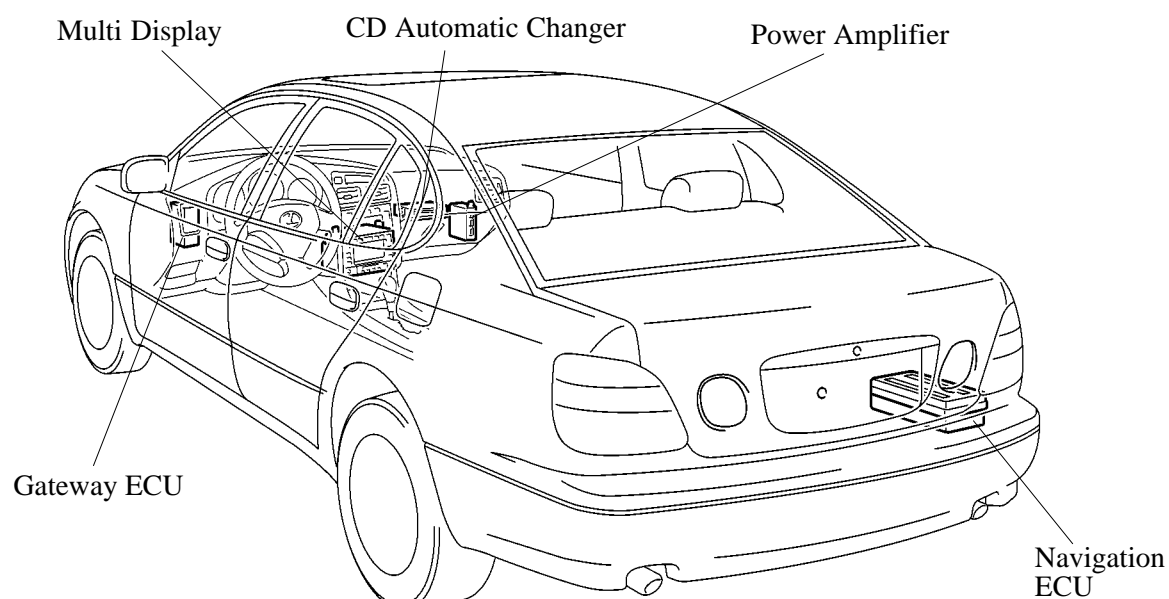


188BE08

### 4. Construction and Operation

#### Gateway ECU

The gateway ECU transmits the vehicle information to the multi display in order for it to be displayed on display. Because vehicle information is transmitted by the ECUs that maintain communication on the BEAN (Body Electronics Area Network), the gateway ECU converts this information into signals for AVC-LAN (Audio Visual Communication Local Area Network) use and sends it to the multi display.

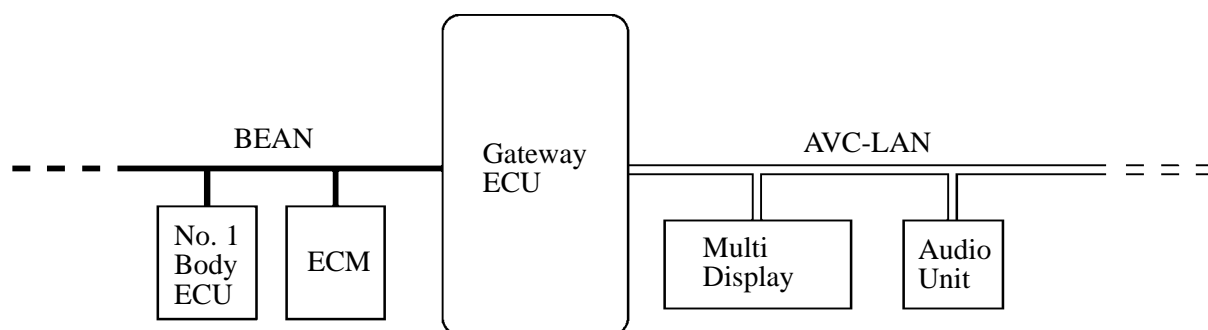

188BE17

## Multi Display

### 1) General

Upon receiving the vehicle information that is transmitted by the gateway ECU, the navigation information that is transmitted by the navigation ECU, and the operation information from audio unit, multi display displays these data on the display.

Listed below are the main function of the multi display.

Function	Outline
Audio Screen Display	<ul style="list-style-type: none"> <li>• Status of audio equipment and audio operation screen indication.</li> <li>• Sound quality adjustment screen indication.</li> </ul>
On-screen Display	<ul style="list-style-type: none"> <li>• Display the operating condition of the air conditioner.</li> <li>• Display the outside temperature.</li> </ul>
Adjustment Screen Display	Image quality adjustment screen indication.
Trip information Display	<ul style="list-style-type: none"> <li>• Cruising Range</li> <li>• Distance After Refueling</li> <li>• Average Speed</li> <li>• Fuel Consumption (Current, After Refueling, Average)</li> </ul>
Navigation Screen Display	<ul style="list-style-type: none"> <li>• Enlargement/reduction, rotation and movement of map.</li> <li>• Indication of current position and direction of travel.</li> <li>• Correction of current position.</li> <li>• Setting, change and indication of route.</li> <li>• Voice guidance.</li> </ul> <p>There are many additional functions.</p>
Diagnosis Screen Display	<ul style="list-style-type: none"> <li>• Service Check Menu</li> <li>• Display Check</li> <li>• Navigation Check</li> </ul> <p>For details, see page 79.</p>

### 2) Navigation Screen

The navigation screen is a function that is provided in the GPS voice navigation system.

Based on the map data on the DVD, signals from the GPS satellites, signals from the built-in gyro sensor, and signals from the vehicle's speed sensor, the vehicle's present position, direction of travel, and driven distance are calculated and displayed on this screen. This screen has the display functions listed below.


	Item	Outline
Map Display	Heading Up/North Up	Changes the orientation of the map.
	Front Wide	Displays a map in the direction of travel of the vehicle in an enlarged form.
	Stepless Scale Display	Changes the scale of the map from the basic 11 steps to an even finer display.
	Direct Scale Change	Directly select and display the map scale.
	Multi-step Scale Display	Change and display the map scale in 11 stages.
	Scroll Display	Scrolls the screen to display the desired point on the map.
	Split-view Display	Displays different modes on a screen that is split into two views.
	Points-of-Interest Display	Displays selected types of marks on the map.
	Taillight-interlocked Map Color Change	Changes the displayed color on the map screen when the taillights are turned ON.
	Road Number Sign Board Display	Displays the road numbers on the map.

(Continued)

Item		Outline
Destination Search	Hybrid Points-of-interest Search	Narrows the search by names of the points-of-interest, category, and areas.
	Points-of-Interest Pinpoint Display	Pinpoints and displays the position of the point-of-interest.
	House Number Search	Searches for a house number.
	Special Memory Point	Sets a pre-registered point as a destination point while driving.
	Nearest Points-of-Interest Search List Display	Searches nearest points-of-interest and displays a list.
	Intersection Search	By specifying two streets, the point at which they intersect is set as the destination point.
	Emergency Search	Performs a specific search for hospitals, police stations, and dealers.
	Freeway Entrance/exit Search	Searches for the destination by the name of the street that connects to a freeway entrance/exit.
Search	Route Search	Searches for multiple routes.
	Search Condition Designation	Searches for the recommended, shortest, and other routes.
	Regulated Road Consideration	Performs search while considering regulated roads.
	Avoidance Area	Avoids a designated area and searches a route.
Guidance	Right or Left Turn Guidance	Voice guidance to instruct the direction of travel to be taken.
	Freeway Direction of Travel Guidance	Voice guidance to instruct the direction of travel to take on the freeway.
	Distance Display to Destination	Displays the distance from the present location to the destination.
	Freeway Branch Type Specimen Guidance	Type specimen for guidance to a freeway branch.
	Intersection Zoom-in Display	Zoom-in display when approaching an intersection.
	Turn List Display	Displays a turn list on the right side of the two-screen display when approaching an intersection.

3) Diagnosis Screen

This system’s diagnosis screen can be displayed and operated on the multi display.  
The diagnosis menu contains the following three items: Service Check Menu, Display Check and Navigation Check.  
For details, refer to the '01 GS430/300 Repair Manual (Pub. No. RM791U).

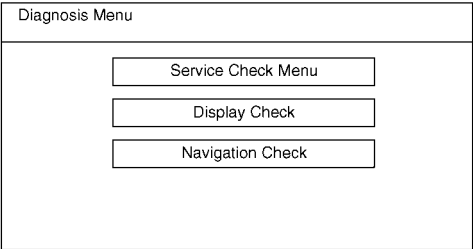

## GPS (Global Positioning System) Voice Navigation

### 1) General


On the '01 GS430/300, the reading of the gyro sensor and map data that are enclosed in the navigation ECU has been changed from HDD (Hard Disc) to DVD (Digital Versatile Disc).

The GPS voice navigation function consists of the following components:

- GPS Antenna
- Speed Sensor
- Speaker
- DVD
- Navigation ECU
- GPS Receiver (Contained in the navigation ECU)
- Gyro Sensor (Contained in the navigation ECU)

### 2) DVD (Digital Versatile Disc)

The DVD, which uses a smaller laser beam diameter than the CD (Compact Disc), is able to record and play back a greater amount of data because it can handle pits, or signal grooves, at a higher density. The volume of data that a 12 cm (0.47 in.) diameter DVD can store is equivalent to approximately 7.5 times that of a CD-ROM, totaling 4.7 giga bytes. The navigation system has adopted a dual-layer DVD, which has two layers per side to store a large capacity of signal data, totaling 8.5 giga bytes.

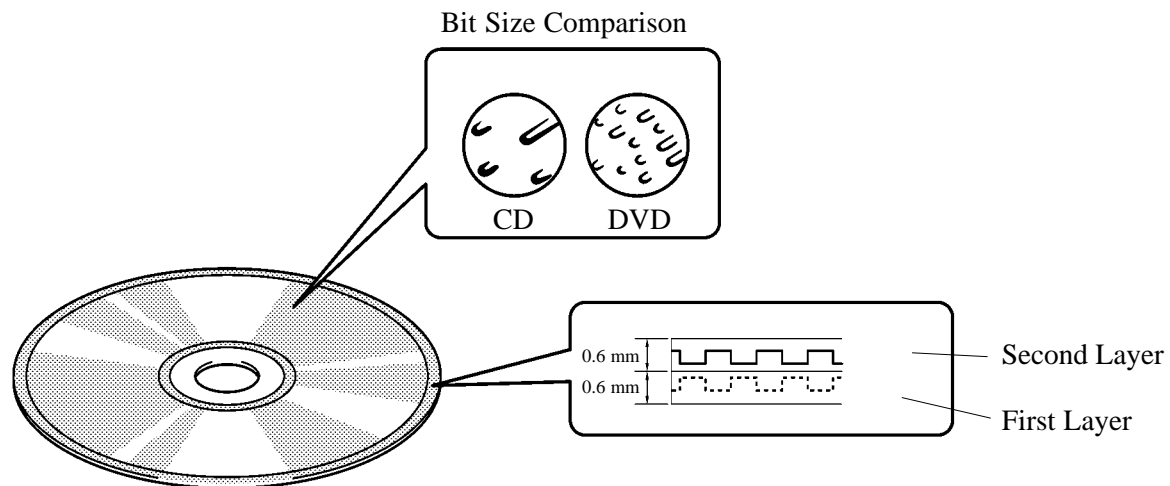


### 3) Gyro Sensor

The gyro sensor is designed to detect the yaw rate of vertical axis turn of the vehicle and installed in the navigation ECU.

The gyro sensor has a turning-fork shape type piezoelectric ceramic piece inside. This piezoelectric ceramic piece deforms by charging voltage and generates voltage by deforming with force.

The piezoelectric ceramic piece inside the gyro sensor is vibrated by the driving circuit and when the vehicle turns (when the detection portion turns to the axis direction), coriolis force is added to the detection portion. With this force, the detection portion is twisted. The voltage generated by this twisting is signal-processed inside the gyro sensor and outputted.

Navigation ECU receives this signal and judges the yaw rate of the vehicle.

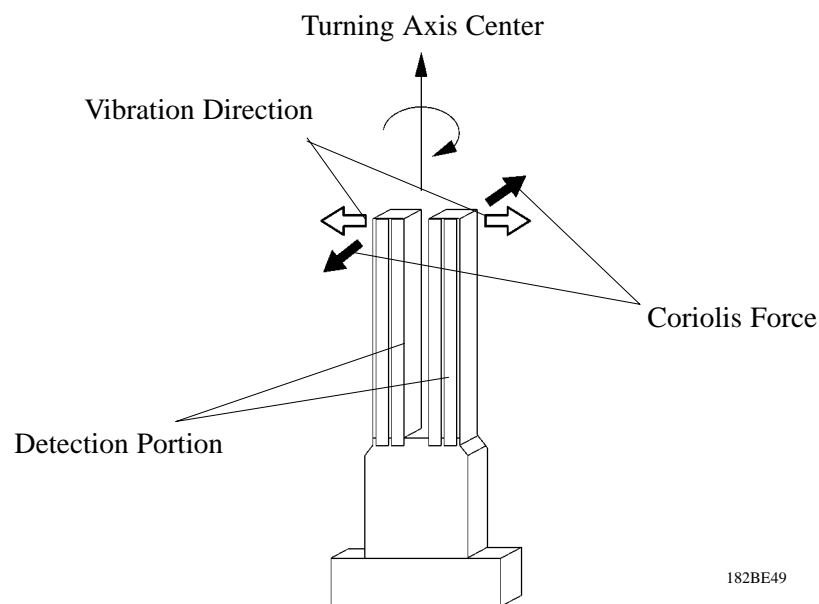

182BE49