


DTC	C1256 / 56	Accumulator Low Pressure Malfunction
------------	-------------------	---

CIRCUIT DESCRIPTION

DTC No.	DTC Detecting Condition	Trouble Area
C1256 / 56	<p>Either of the following 1. through 7. is detected:</p> <ol style="list-style-type: none"> 1. With the vehicle running, when the pressure switch (PL) detects high pressure, although ABS, TRAC or VSC does not control, the pressure switch (PL) detects low pressure for more than 1.4 sec. 2. With the vehicle running, when the pressure switch (PL) detects high pressure, although ABS, TRAC or VSC controls, the pressure switch (PL) detects low pressure for more than 0.2 sec. 3. After the ignition switch is turned ON, the pressure switch (PL) detects low pressure for more than 60 sec. 4. With the vehicle running, after ignition switch has been ON, the pressure switch (PL) detects low pressure for more than 0.2 sec. although ABS, TRAC, or VSC does not control and when the pressure switch is ON and stuck under high pressure. 5. With the vehicle running, after ignition switch is ON, the pressure switch (PL) detects low pressure for more than 0.2 sec. when ABS, TRAC or VSC controls, the pressure switch is ON and stuck under high pressure. 6. With the vehicle running, after ignition switch is ON, the pressure switch (PL) is stuck to under low pressure although ABS, TRAC or VSC does not control for more than 1.4 sec. 7. With the vehicle running, after ignition switch is ON, the pressure switch (PL) is stuck under low pressure when ABS, TRAC or VSC controls for more than 0.2 sec. 	<ul style="list-style-type: none"> • Accumulator • Pressure switch (PH or PL) • Hydraulic brake booster pump motor

WIRING DIAGRAM

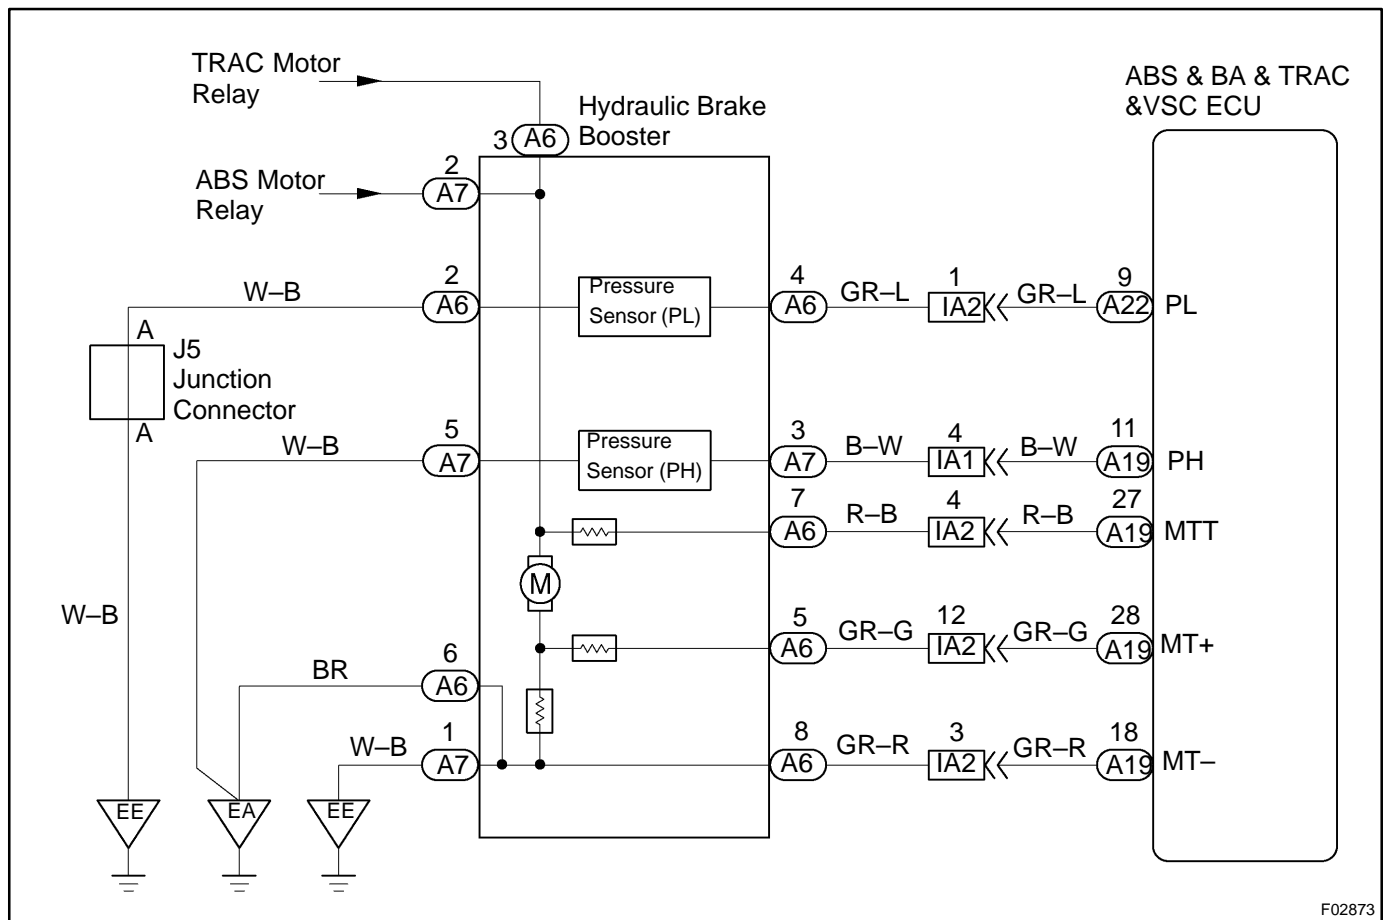

INSPECTION PROCEDURE

1 Check accumulator operation.

PREPARATION:

(a) Turn the ignition switch OFF, and depress the brake pedal 40 times or more.

HINT:

When a pressure in power supply system is released, reaction force becomes heavy and stroke becomes shorter.

(b) Install the LSPV gauge (SST) to rear brake caliper and bleed air.

SST 09709-29018

CHECK:

Depress the brake pedal with force of more than 343 N (35 kgf, 77 lbf) and turn the ignition switch ON, then check the rear brake caliper pressure when an increase of pressure changes from acutely to mildly.

OK:

5,099 – 8,924 kPa (52 – 91 kgf/cm², 740 – 1,294 psi) at 20°C (68°F)

HINT:


If the value is not within the standard, cool the engine room and check it again.

NG

Replace accumulator.

OK

2 Check operation of hydraulic brake booster pump motor.

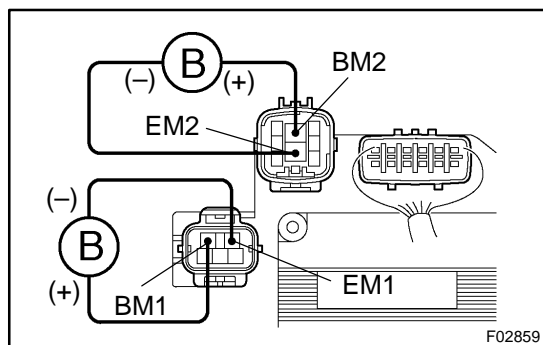

PREPARATION:

Disconnect the 2 connectors from the hydraulic brake booster.

CHECK:

Connect battery positive \oplus lead to BM1 or BM2 terminal and battery negative \ominus lead to EM1 or EM2 terminal of the hydraulic brake booster (pump motor) connector.

OK:


The operation sound of the pump motor should be heard.

NG

Go to step 7.

OK

3 Check pressure switch (PH) operation.

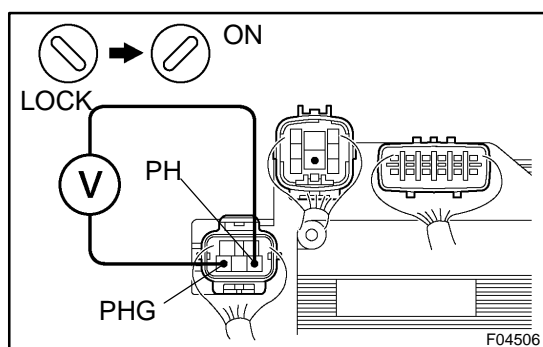

PREPARATION:

(a) Turn the ignition switch OFF, and depress the brake pedal 40 times or more.

HINT:

When a pressure in power supply system is released, reaction force becomes heavy and stroke becomes shorter.

(b) Install the LSPV gauge (SST) to the rear brake caliper and bleed air.

SST 09709-29018

CHECK:

While checking the voltage between terminals PH and PHG of hydraulic brake booster, depress the brake pedal with force of more than 343 N (35 kgf, 77 lbf) and turn the ignition switch ON, then check the rear wheel cylinder pressure when voltage changes from 6 V to 0 V.

OK:


12,553 – 20,104 kpa (128 – 205 kgf-cm², 1,820 – 2,916 psi)

PREPARATION:

Turn the ignition switch OFF and disconnect the connector(5P) from the hydraulic brake booster.

CHECK:

While checking the resistance between terminals PH and PHG, depress the brake pedal changing the force in the range of 197 N (20 kgf, 44 lbf) to 343 N (35 kgf, 77 lbf) and check the rear wheel cylinder pressure when resistance changes from 0 k Ω to 1 k Ω between PH and PHG.

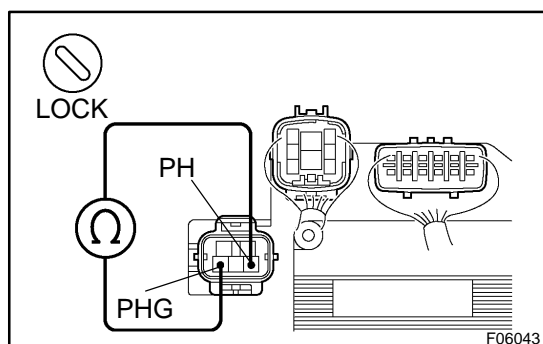

OK:

11,964 – 18,240 kpa (122 – 186 kgf-cm², 1,735 – 2,645 psi)

HINT:

After inspection, connect the connector, fill brake reservoir with brake fluid and clear the DTC (See page [DI-484](#)).

OK

Go to step 5.

NG**4**

Check for open circuit in harness and connector between pressure switch (PH) and ABS & BA & TRAC & VSC ECU (See page [IN-32](#)).

NG


Repair or replace harness or connector.

OK

Replace hydraulic brake booster assembly.

5

Check pressure switch (PL) operation.

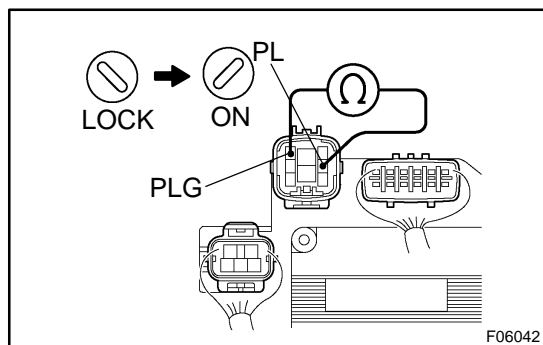**PREPARATION:**

- (a) Turn the motor switch OFF, and depress the brake pedal 40 times or more.

HINT:

When a pressure in power supply system is released, reaction force becomes heavy and stroke becomes shorter.

- (b) Install the LSPV gauge (SST) to the rear brake caliper and bleed air.

SST 09709 –29018

- (c) Disconnect the connector (8P) from the hydraulic brake booster.

CHECK:

While checking the resistance between terminals PL and PLG of hydraulic brake booster, depress the brake pedal with force of more than 343 N (35 kgf, 77 lbf) and turn the ignition switch ON, then check the rear wheel cylinder pressure when the resistance changes from 5.7 kΩ to 1.0 kΩ.

OK:

9,022 – 15,102 kpa (92 – 154 kgf-cm², 1,308 – 2,190 psi)

PREPARATION:

Turn the ignition switch OFF and disconnect the connector (8P) from the hydraulic brake booster.

CHECK:

While checking the resistance between terminals PL and PLG of hydraulic brake booster, depress the brake pedal changing the force in the range of 197 N (20 kgf, 44 lbf) to 343 N (35 kgf, 77 lbf) and check the rear wheel cylinder pressure when resistance changes from 1.0 kΩ to 5.7 kΩ.

OK:

8,532 – 13,337 kpa (87 – 136 kgf-cm², 1,237 – 1,934 psi)

HINT:

After inspection, connect the connector, fill brake reservoir with brake fluid and clear the DTC (See page [DI-484](#)).

NG

Replace hydraulic brake booster assembly.

OK

6

Check pressure switch (PH) and pressure switch (PL).

CHECK:

Compare the pressure value of the rear wheel cylinder measured in check pressure switch (PL) operation with the one measured in check pressure switch (PH) operation.

OK:

- **Pressure when the voltage between PH and PHG becomes 6 to 0 V > pressure when the resistance between PL and PLG becomes 5.7 kΩ to 1.0 kΩ.**
- **Pressure when the resistance between PH and PHG becomes 0 kΩ to 1 kΩ > pressure when the resistance between PL and PLG becomes 1.0 kΩ to 5.7 kΩ.**

NG

Replace hydraulic brake booster assembly.

OK

Check and replace ABS & BA & TRAC & VSC ECU.

7	Check for open and short circuit in harness and connector between hydraulic brake booster pump motor and hydraulic brake booster (See page IN-32).
---	---

NG

Replace wire harness.

OK

8	Check hydraulic brake booster pump motor (See page BR-53).
---	---

NG

Replace hydraulic brake booster pump motor.

OK

Replace hydraulic brake booster.