
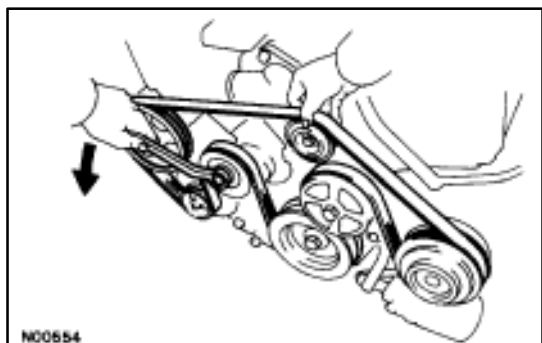


Power Steering Pump REMOVAL AND INSTALLATION OF POWER STEERING PUMP


Remove and install the parts as shown.

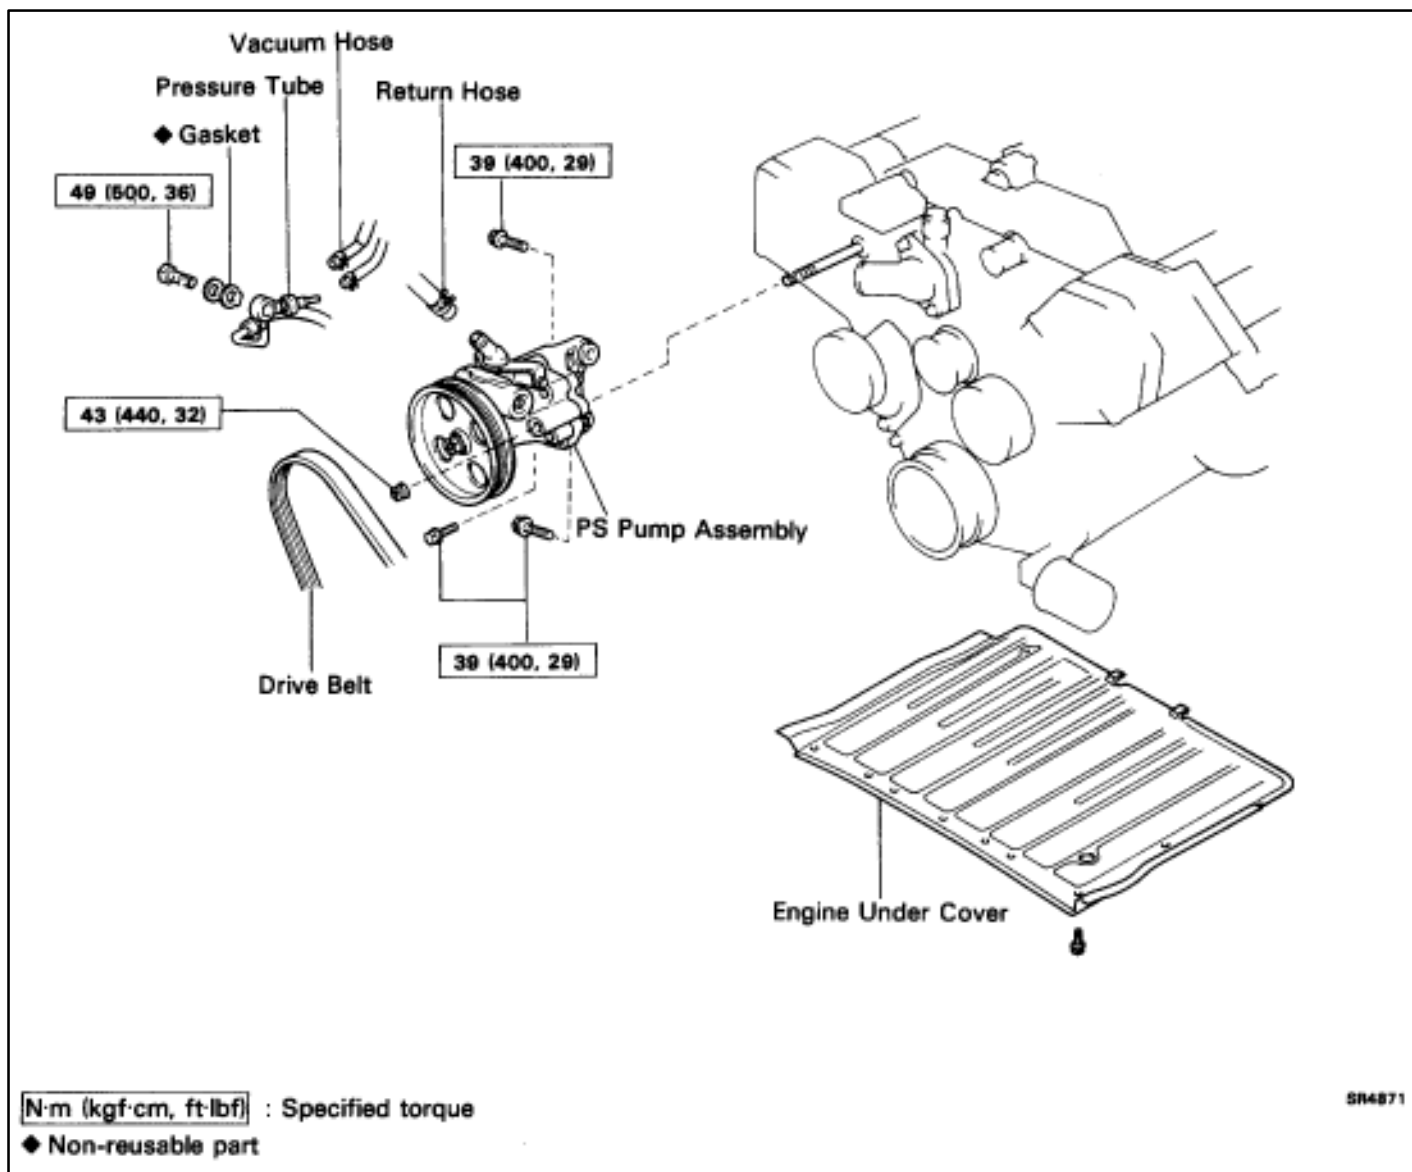

(MAIN POINTS OF REMOVAL AND INSTALLATION)

1. REMOVE DRIVE BELT

Loosen the drive belt tension by turning the drive belt tensioner counterclockwise, and remove the drive belt.

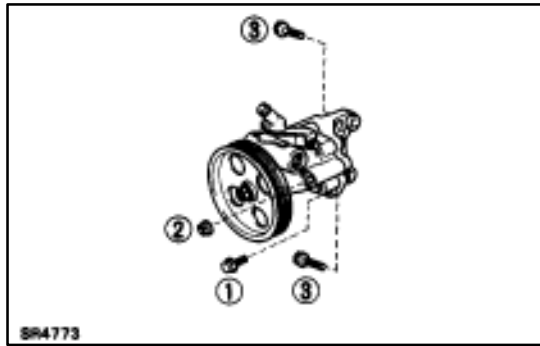


2. INSTALL PUMP ASSEMBLY

Torque the bolts and nut on the pump assembly in the order shown.

Torque: Bolt 39 N·m (400 kgf·cm, 29 ft·lbf)

Nut 43 N·m (440 kgf·cm, 32 ft·lbf)

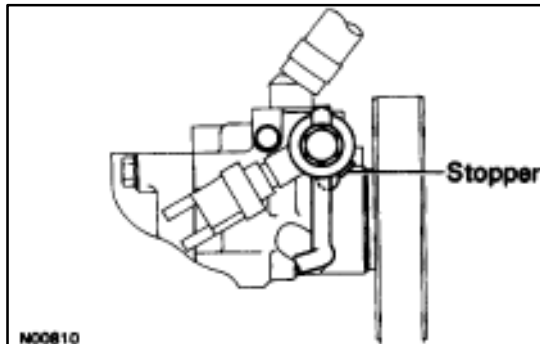

3. CONNECT PRESSURE TUBE


Make sure the stopper is touching the pump housing as shown, then torque the union bolt.

Torque: 49 N·m (500 kgf·cm, 36 ft·lbf)


4. BLEED POWER STEERING SYSTEM


(See page [SR-79](#))

COMPONENTS

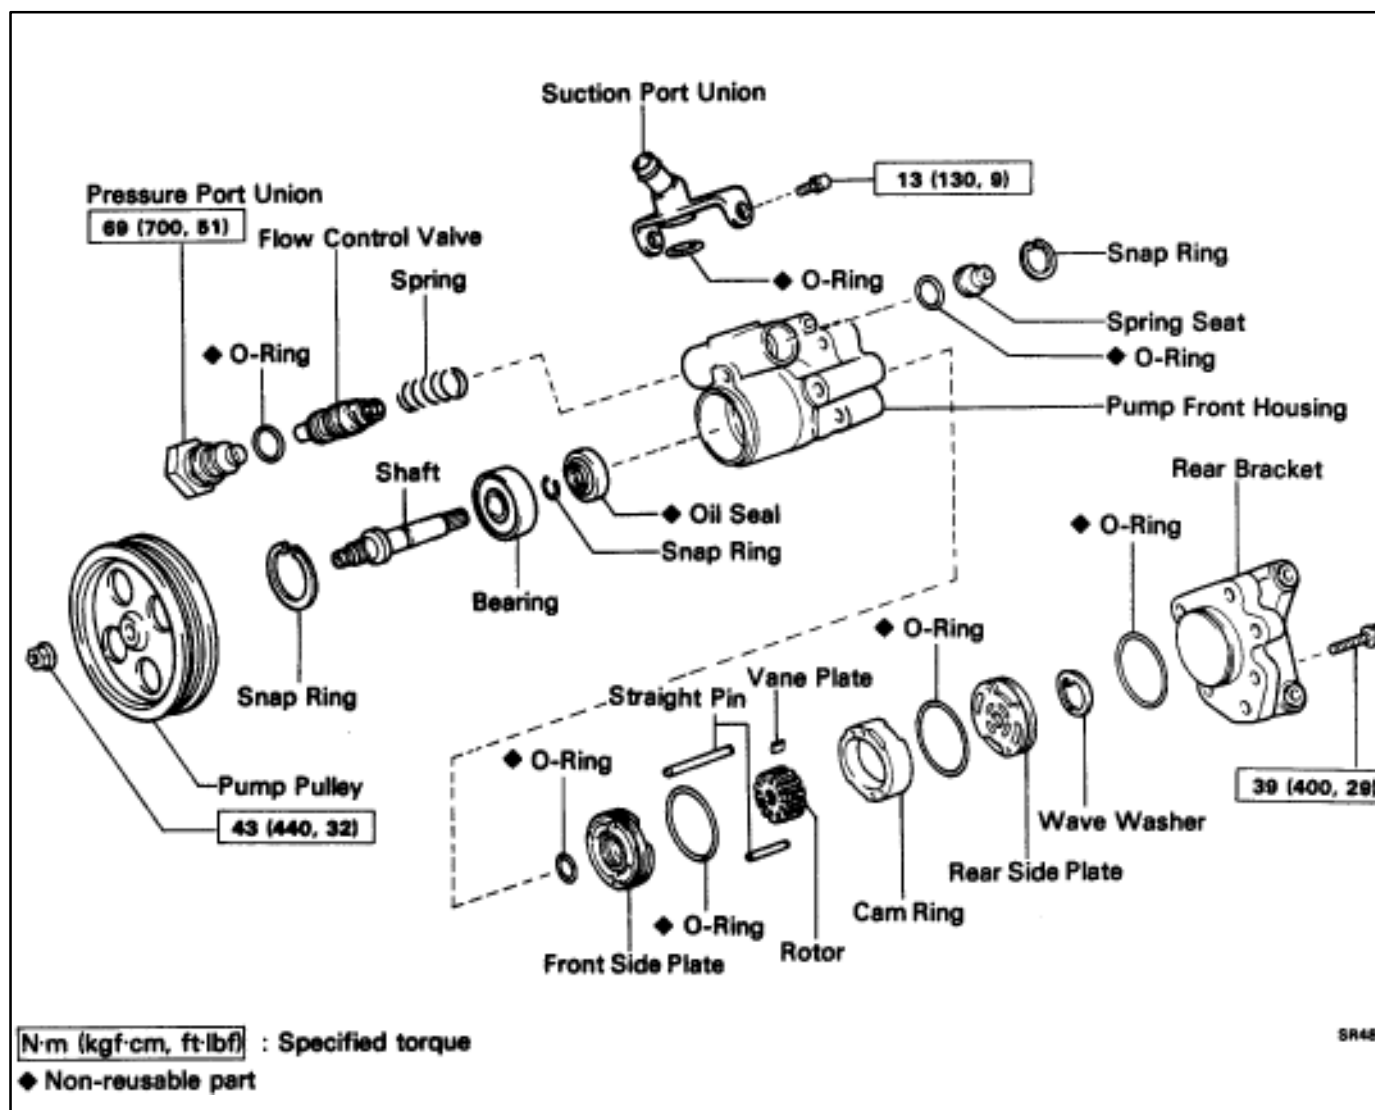

SECTIONAL VIEW

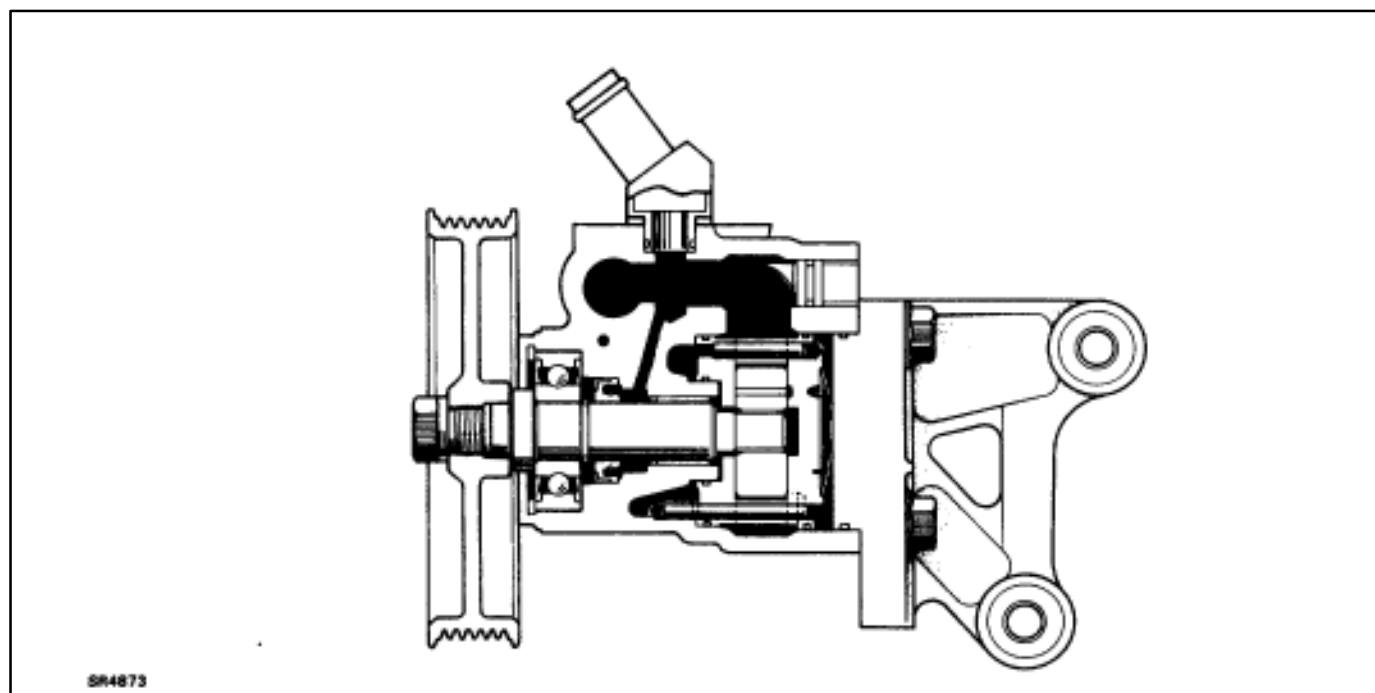

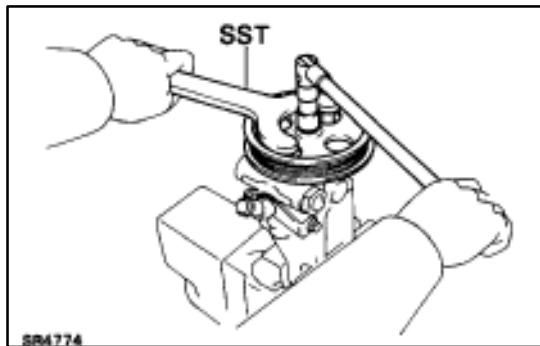

DISASSEMBLY OF POWER STEERING PUMP

1. MOUNT POWER STEERING PUMP IN VISE


NOTICE: Do not tighten the vise too tight.

2. REMOVE PUMP PULLEY

(a) Using SST, remove the pulley set nut.

SST 09278-54012


(b) Remove the pulley.

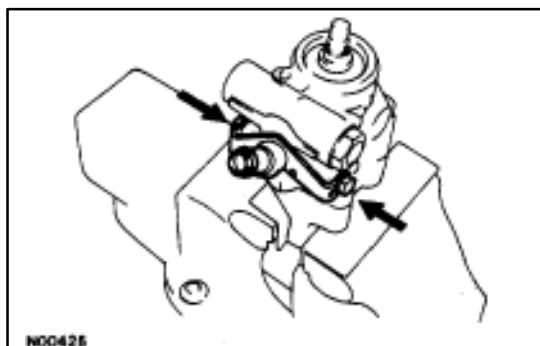

3. REMOVE SUCTION PORT UNION

(a) Remove the two bolts and union.

(b) Remove the O-ring from the union.

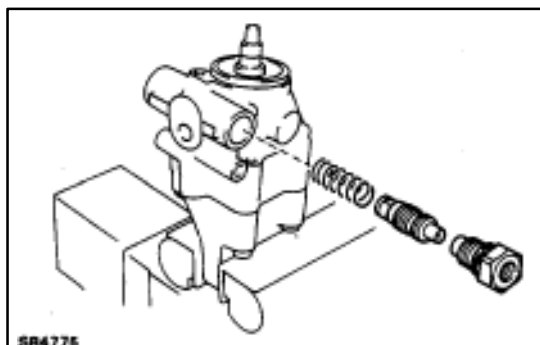


4. REMOVE PRESSURE PORT UNION, FLOW CONTROL VALVE AND SPRING

(a) Remove the pressure port union.

(b) Remove the O-ring from the union.


(c) Remove the flow control valve and spring.

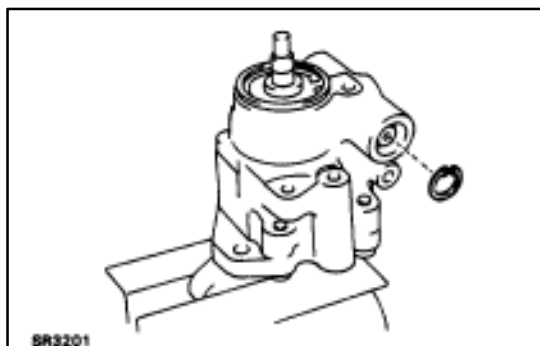

5. REMOVE SPRING SEAT

(a) Using snap ring pliers, remove the snap ring.


HINT: The snap ring is easier to remove if the spring seat is pressed down slightly.

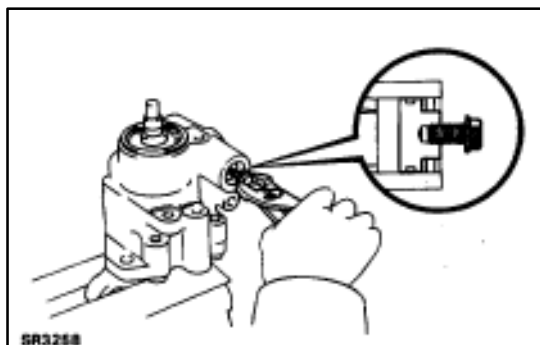

(b) Temporarily install a bolt to the seat and pull out it.


HINT: Use a bolt with diameter 6 mm (0.24 in.) and pitch 1.0 mm (0.039 in.)

(c) Remove the O-ring from the seat.

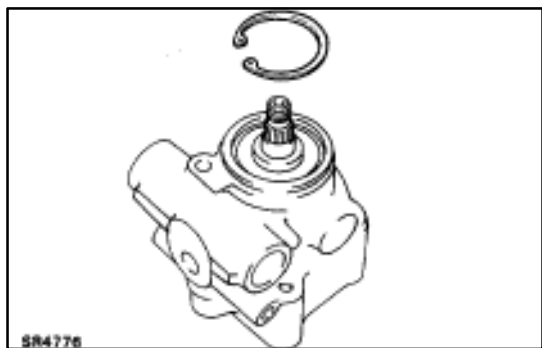

6. REMOVE VANE PUMP SHAFT WITH BEARING


(a) Using snap ring pliers, remove the snap ring.

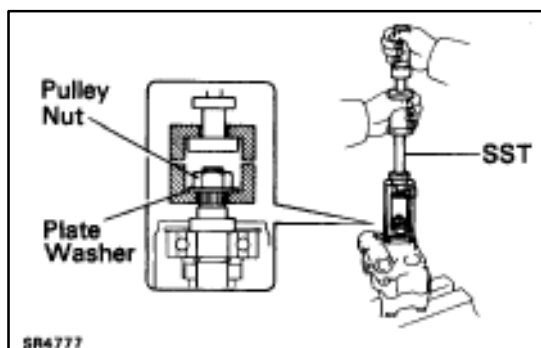

(b) Temporarily install the appropriate plate washer and pulley nut to the shaft.

(c) Using SST, pull out the shaft.


SST 09910-00015 (09911-00011, 09912-00010)

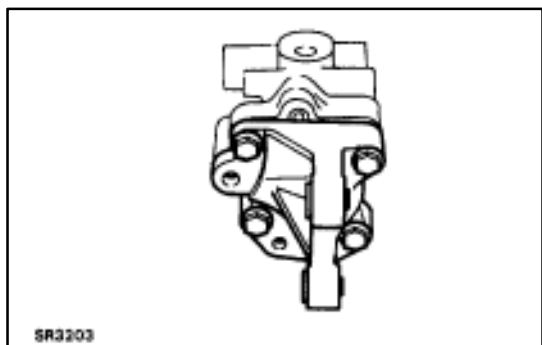


7. REMOVE REAR BRACKET

(a) Remove the four bolts and rear bracket.

(b) Remove the O-ring from the bracket.

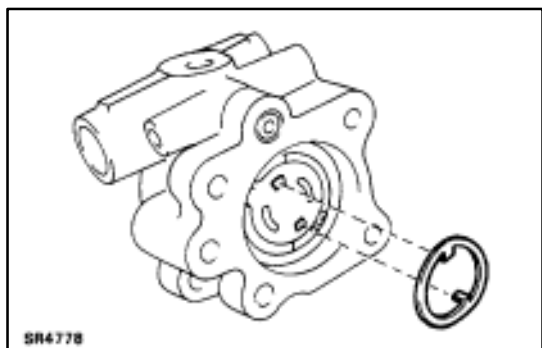


8. REMOVE WAVE WASHER

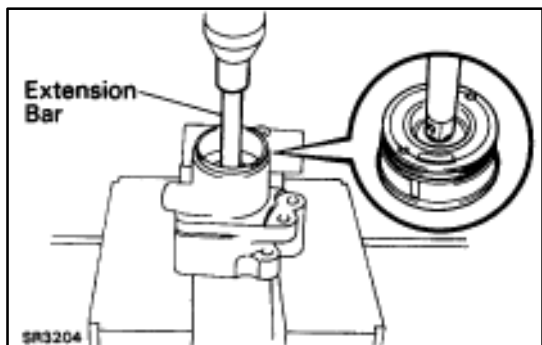


9. REMOVE FRONT SIDE PLATE, CAM RING, ROTOR, VANE PLATES AND REAR SIDE PLATE

(a) Using an extension bar and press, remove the front side plate, cam ring, rotor, vane plates and rear side plate as an assembly.


HINT: Catch the assembly in your hand to prevent it dropping.

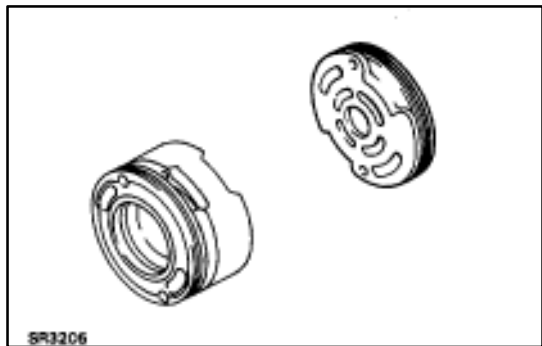


- (b) Remove the rear side plate.
- (c) Remove the O-ring from the rear side plate.

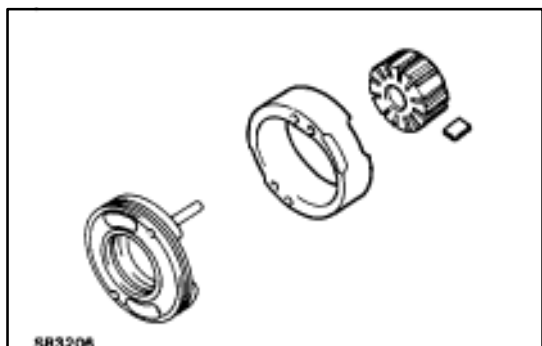


- (d) Remove the cam ring, rotor and the ten vane plates.

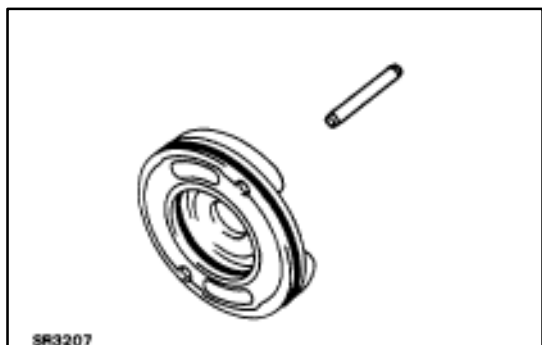

- (e) Remove the straight pin from the front side plate.
- (f) Remove the two O-rings from the front side plate.

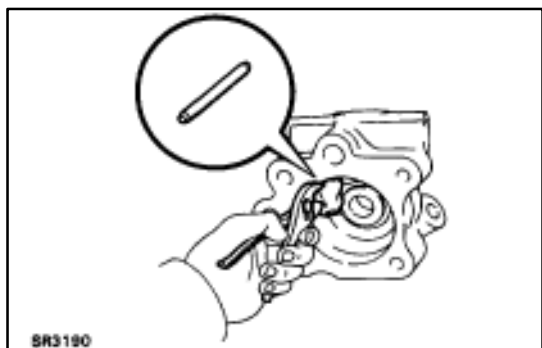

- (g) Remove the straight pin from the front housing.
HINT: Place a workshop rag over the pin to prevent damaging it.

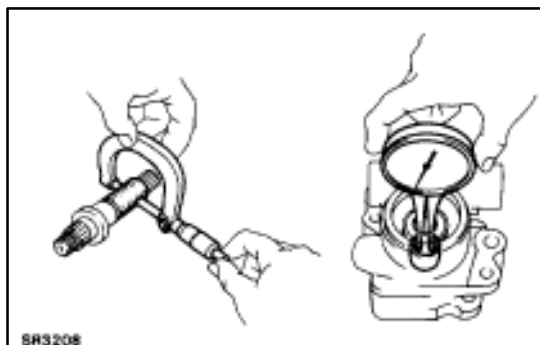

INSPECTION OF POWER STEERING PUMP

1. MEASURE OIL CLEARANCE OF SHAFT AND BUSHING

Using a micrometer and calipers, measure the oil clearance.

Standard clearance: 0.01–0.03 mm

(0.0004–0.0012 in.)

Maximum clearance: 0.07 mm (0.0028 in.)

If more than maximum, replace the entire power steering pump.



2. INSPECT ROTOR AND VANE PLATES

(a) Using a micrometer, measure the height, thickness and length of the vane plates.

Minimum height: 8.0 mm (0.315 in.)

Minimum thickness: 1.77 mm (0.0697 in.)

Minimum length: 14.97 mm (0.5894 in.)

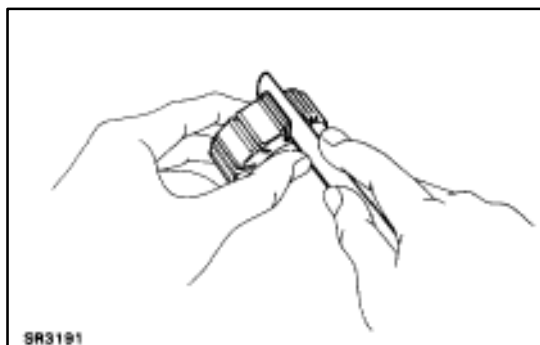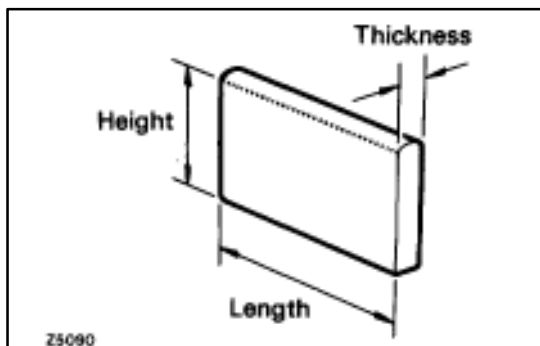

(b) Using a feeler gauge, measure the clearance between the rotor groove and vane plate.



Maximum clearance: 0.03 mm (0.0012 in.)

If more than maximum, replace the vane plate and/or rotor with one having the same mark stamped on the cam ring.

Inscribed mark: 1,2,3,4 or None


HINT: There are five vane lengths with the following rotor and cam ring marks:

Rotor and cam ring number	Vane length mm (in.)
None	14.996–14.998 (0.5904–0.5905)
1	14.994–14.996 (0.5903–0.5904)
2	14.992–14.994 (0.5902–0.5903)
3	14.990–14.992 (0.59016–0.59024)
4	14.988–14.990 (0.5901–0.5902)

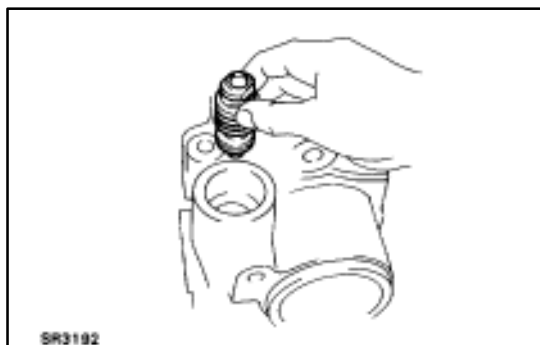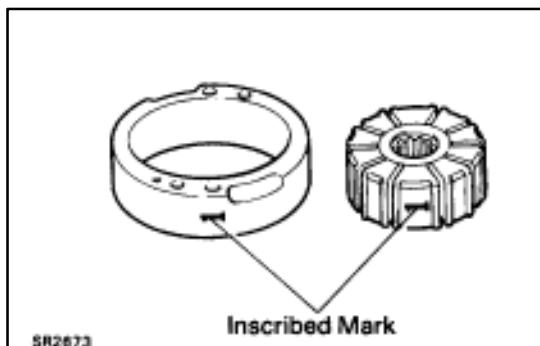


3. INSPECT FLOW CONTROL VALVE

(a) Coat the valve with power steering fluid and check that it falls smoothly into the valve hole by its own weight.

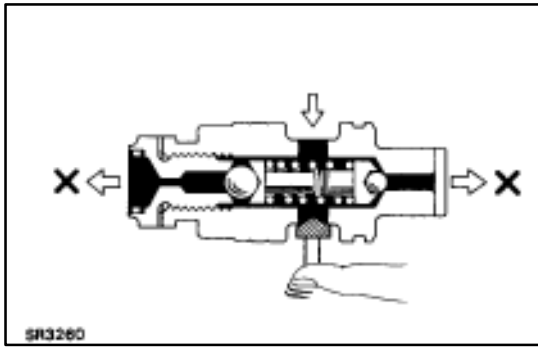


- (b) Check the flow control valve for leakage. Close one of the holes and apply compressed air [392–490 kPa (4–5 kgf/cm², 57–71 psi)] into the opposite side, and confirm that air does not come out from the end holes.

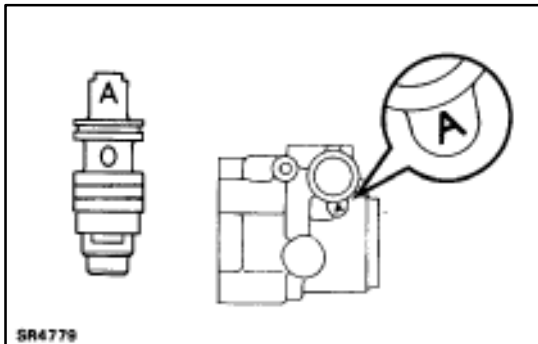

If necessary, replace the valve with one having the same letter as inscribed on the front housing.

Inscribed mark: A, B, C, D, E or F

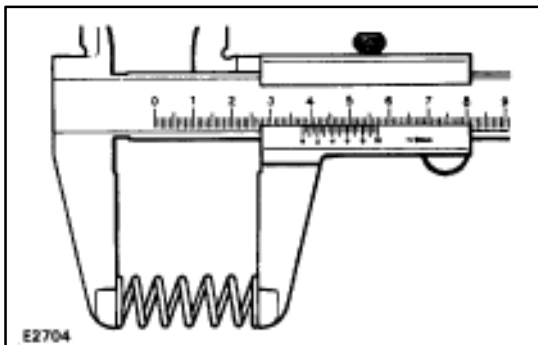


4. INSPECT FLOW CONTROL SPRING

Using a scale, measure the free length of the spring.

Minimum spring length: 36 mm (1.42 in.)


If not within specification, replace the spring.

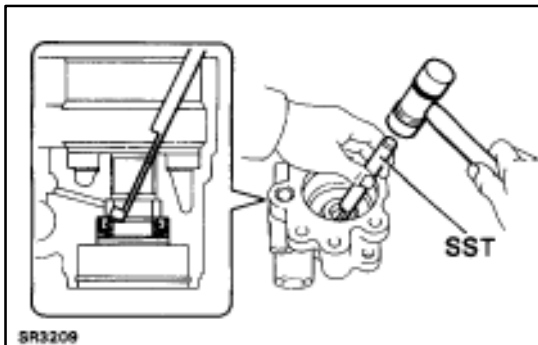

5. IF NECESSARY, REPLACE OIL SEAL


(a) Using SST, tap out the oil seal.

SST 09631–10030

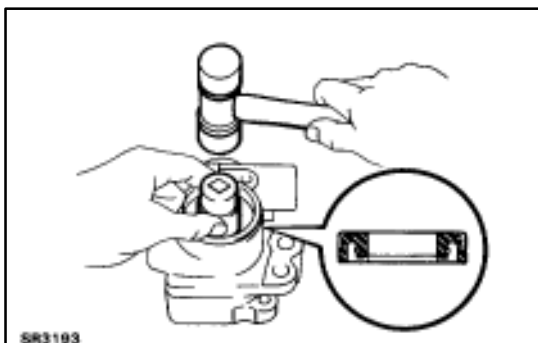


(b) Using a 22 mm socket wrench and hammer, drive in a new oil seal.

(c) Coat the oil seal lip with power steering fluid.

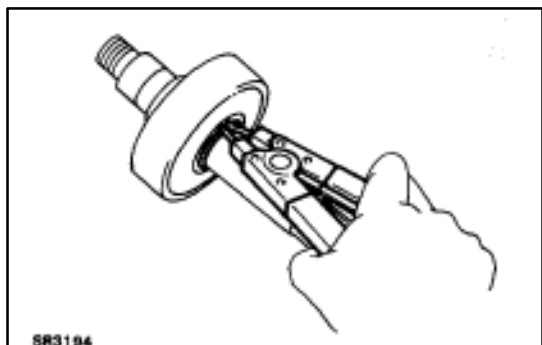

6. IF NECESSARY, REPLACE BEARING


(a) Using snap ring pliers, remove the snap ring.

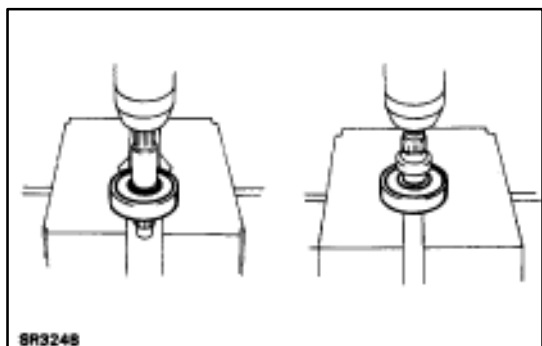

(b) Using a press, press out the bearing.

(c) Using a press, press in a new bearing.

(d) Using snap ring pliers, install the snap ring.

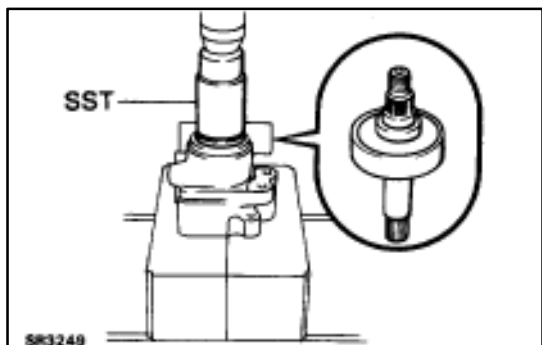

ASSEMBLY OF POWER STEERING PUMP

(See page [SR-85](#))


1. COAT ALL SLIDING SURFACES WITH POWER STEERING FLUID BEFORE ASSEMBLY

2. INSTALL VANE PUMP SHAFT WITH BEARING

(a) Using SST and a press, press in the shaft.


SST 09238-47012


(b) Using snap ring pliers, install the snap ring.

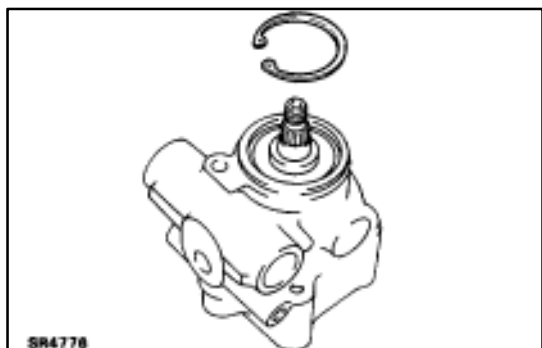


3. INSTALL FRONT SIDE PLATE, CAM RING, ROTOR, VANE PLATES AND REAR SIDE PLATE

(a) Install the longer straight pin to the front housing.

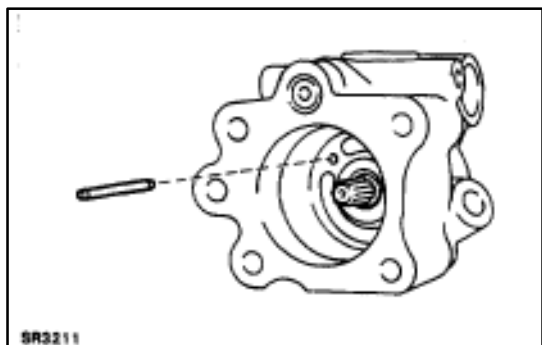

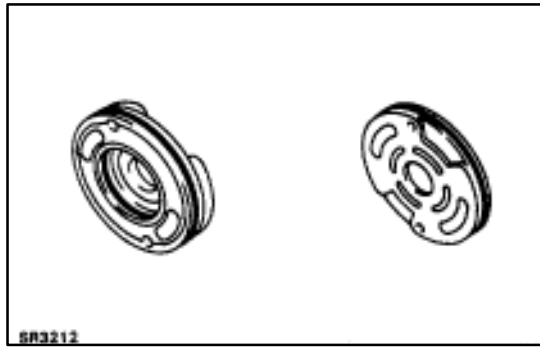

- (b) Coat new O-rings with power steering fluid and install them on the front side plate and rear side plate.

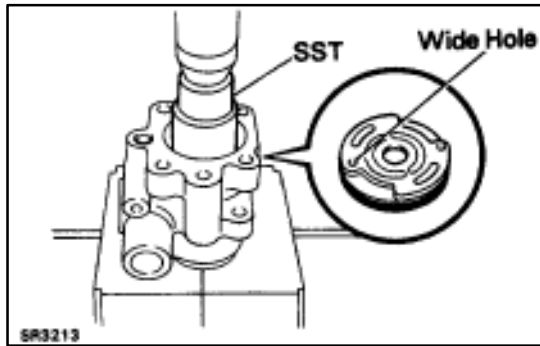


- (c) Using SST and a press, press in the front side plate.


SST 09238-47012

HINT: Match the wide hole on the front side plate with the straight pin.

NOTICE: Be careful not to damage the O-rings.

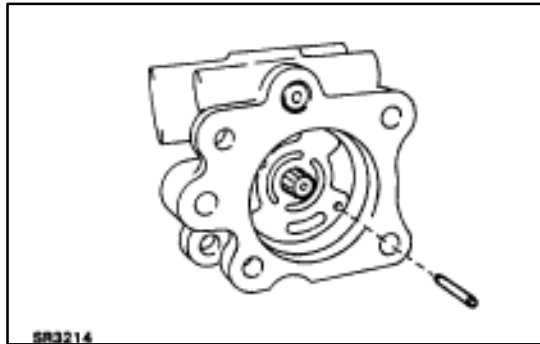


- (d) Install the shorter straight pin to the front side plate.

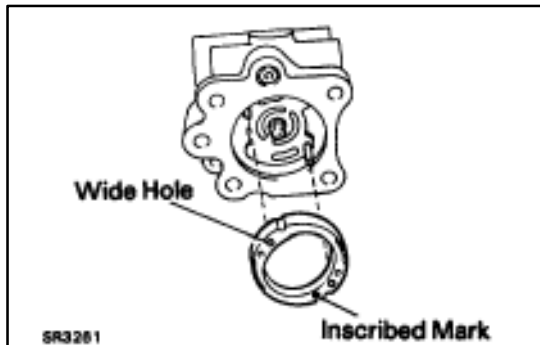


- (e) Match the wide hole of the cam ring with the longer straight pin, and install the cam ring.


HINT: Install the cam ring with the inscribed mark facing the rear.

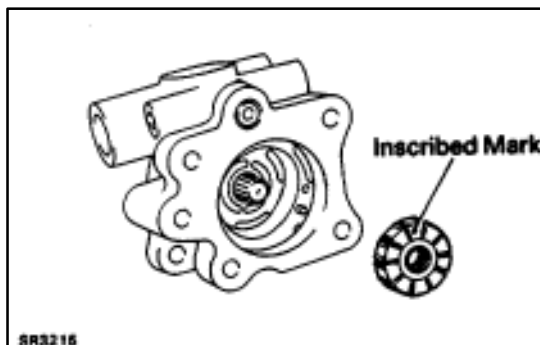

- (f) Install the rotor to the shaft with the inscribed mark on the rotor facing toward the rear.

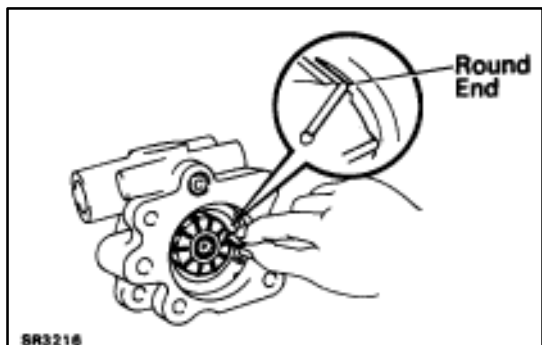


- (g) Install the ten vane plates with the round end facing outward.

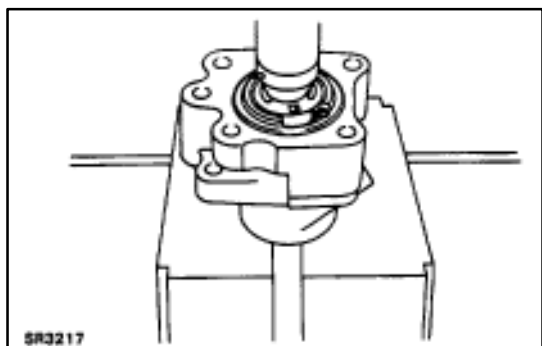


- (h) Match the wide hole with the longer straight pin and press in the rear side plate with a press.

NOTICE: Be careful not to damage the O-ring.

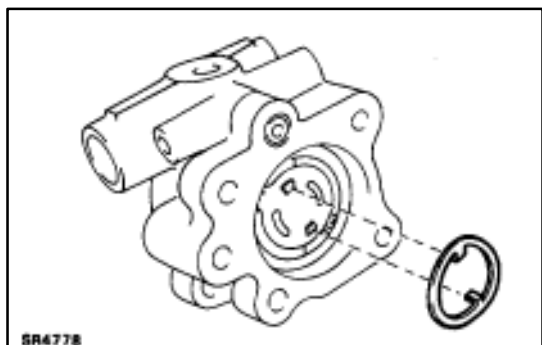


4. INSTALL WAVE WASHER

Install the wave washer so that its protrusions fit into the slots in the rear side plate.

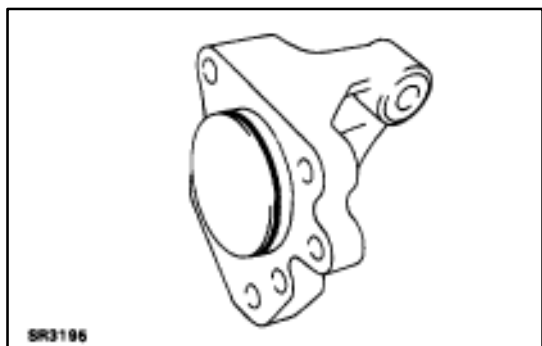


5. INSTALL REAR BRACKET

- (a) Coat a new O-ring with power steering fluid and install it to the rear bracket.

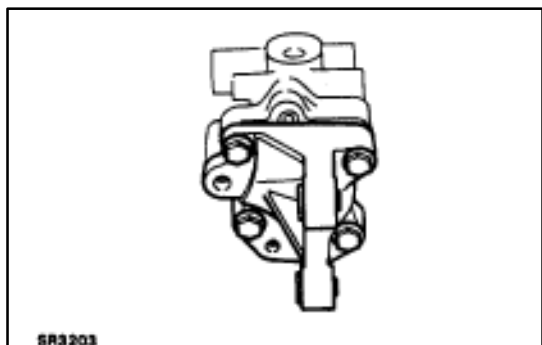


- (b) Install the rear bracket and tighten the four bolts.
Torque: 39 N·m (400 kgf·cm, 29 ft·lbf)

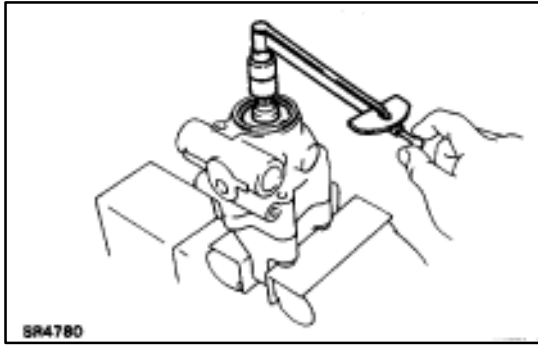**6. MEASURE PUMP SHAFT PRELOAD**

- (a) Check that the shaft rotates smoothly without abnormal noise.
- (b) Temporarily install the pulley nut and check the rotating torque.


Rotating torque:

0.1 N·m (1.0 kgf·cm, 0.9 in.-lbf) or less

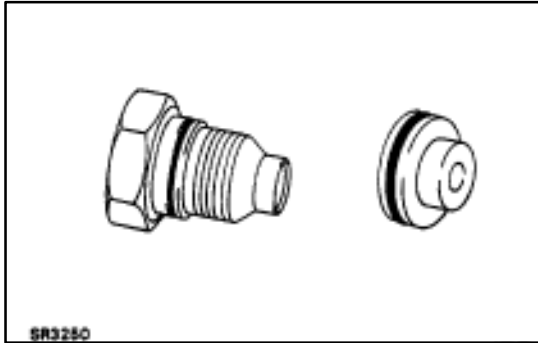
**7. INSTALL FLOW CONTROL VALVE, SPRING, SPRING SEAT AND PRESSURE PORT UNION**

- (a) Coat new O-rings with power steering fluid and install them to the spring seat and pressure port union.


HINT: Install a thick O-ring to the spring seat and a thin O-ring to the pressure port union.

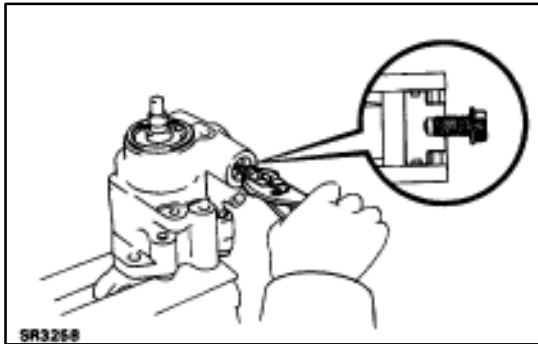

- (b) Insert the spring seat with the bolt hole facing outward.

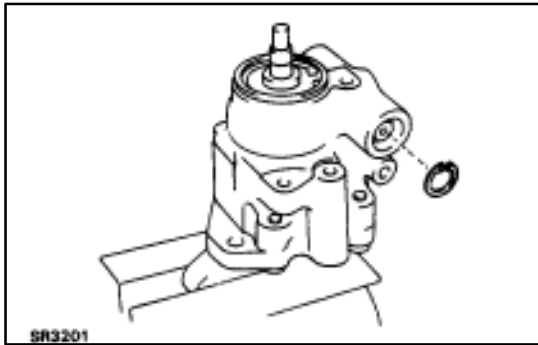


- (c) Using snap ring pliers, install the snap ring.

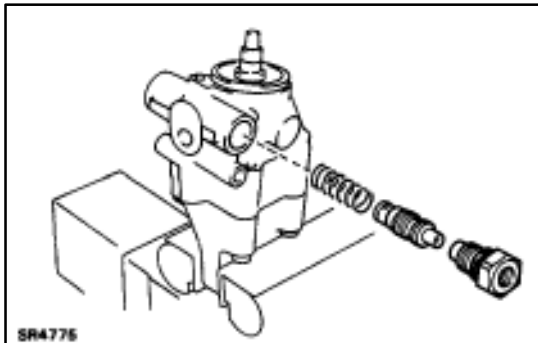


- (d) Install spring and valve to the housing.
- (e) Install and torque the pressure port union.

Torque: 69 N·m (700 kgf·cm, 51 ft-lbf)

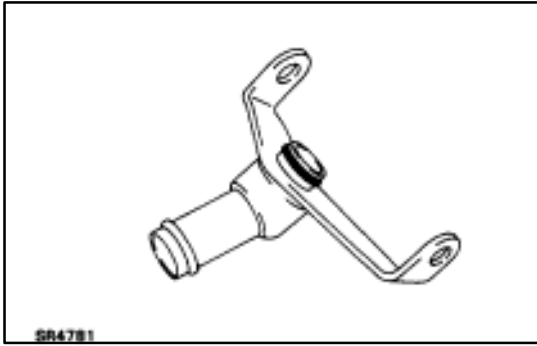


8. INSTALL SUCTION PORT UNION

- (a) Coat a new O-ring with power steering fluid and install it to the suction port union.

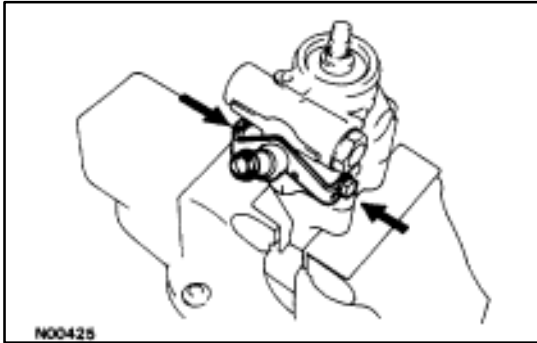

- (b) Install the suction port union with the two bolts.

Torque: 13 N·m (130 kgf·cm, 9 ft·lbf)

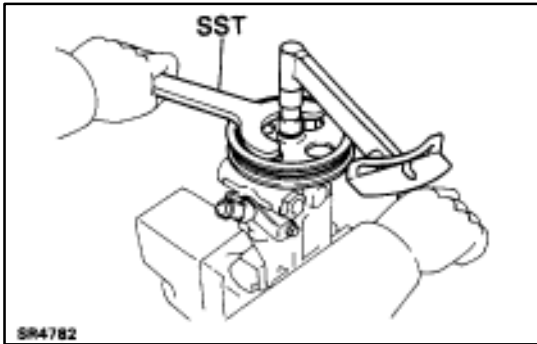

9. INSTALL PUMP PULLEY

- (a) Install the pulley and nut to the shaft.
- (b) Using SST, torque the set nut.

SST 09278-54012

Torque: 43 N·m (440 kgf·cm, 32 ft·lbf)